



REVISION		
REV	DESCRIPTION	DATE
A	최초 개정	2008.10.31.
A	BODY A,B 역지끼움 공차 변경(설번200810-0030)	2008.11.28.

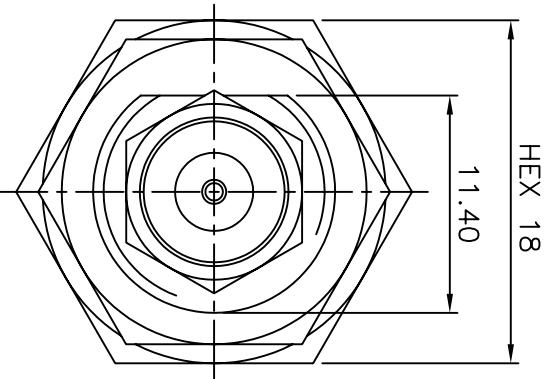

* ELECTRICAL SPECIFICATIONS
Frequency Range : DC ~ 18GHz
Impedance : 50Ω (Nominal)
V.S.W.R (Max.) : 1.2 : 1

10	WASHER	1	BRASS	Nickel Plated	DWA00022-5/1 (G6008)
9	NUT	1	BRASS	Nickel Plated	DNT00020-5/1 (N6002)
8	SPRING RING	1	Stainless steel	Passivated	DSR00002-5/1 (R2001)
7	COUPLING CAP	1	Stainless steel	Passivated	DCU00006-5/1 (K2004)
6	INSULATOR	2	PTFE		DIN00216-N/1 (H2261)
5	GASKET	1	SILICONE RUB		DGK00036-N/1 (G6007)
4	GASKET	1	SILICONE RUB		DGK00004-N/1 (G2001)
3	CONTACT	1	Beryllium copper	Gold Plated	DCT01746-5/1
2	BODY (B)	1	Stainless steel	Passivated	DBD02222-5/1
1	BODY (A)	1	Stainless steel	Passivated	DBD02221-5/1
NO.	DESCRIPTION	Q'TY	MATERIAL	PLATING	CODE
DATE		2008. 10. 31.			
APPROVED BY		S.J.YOUN			
CHECKED BY		E.H.KIM			
DRAWN BY		I.C.KIM			
SCALE		2.5/1	UNIT	mm	
FINISH					

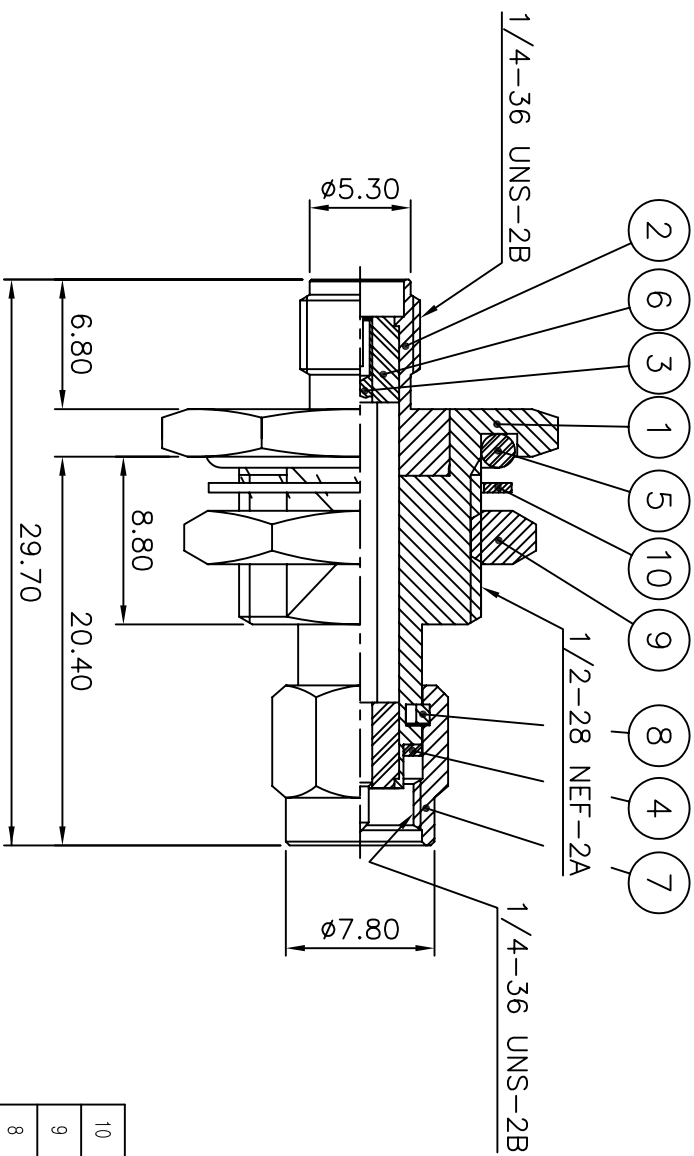

KJ COMTECH CO.,LTD.

RF & MICROWAVE
TECHNOLOGY
Tel : 82-32-347-8015
Fax : 82-32-347-8017

TITLE
SMAJ-SMAP BH
ADAPTOR

DWG NO. AD00382-7/2

REVISION 1 R SHEET 1 of 1