


AD00385-7/1



SMA (J) SMA (P)
RA L:16.95-14.95mm
BO/GO, PI/GO, CAP/GO

AD00385-7/1

Frequency	
Insertion Loss	
VSWR	
Impedance	■ 50Ω □ 75Ω
Temperature	-40℃ ~ 125℃

S11/S22/S21(SWR, SWR, dB)

■_1GHz	- 1.01, 1.01, 0.04
■_3GHz	- 1.02, 1.02, 0.08
■_6GHz	- 1.10, 1.10, 0.14

■_8GHz	- 1.24, 1.24, 0.22
■10GHz	- 1.43, 1.43, 0.33
■12GHz	- 1.72, 1.65, 0.53
■14GHz	- 1.91, 1.84, 0.70
■16GHz	- 2.00, 2.00, 0.81
■18GHz	- 2.32, 2.31, 1.12
■MaX_--	- 2.32, 2.31, 1.12

▶ NETWORK ANALYZER

▶ Test cable




▶ Test Adaptor

□ E5071B (~8.5GHz)

■ ZVA50 (~50GHz)

■ 2.4mm Male to 2.4mm Male
50GHz Cable

■ AD00644-7/2
2.92mm (J) to 2.92mm(J)

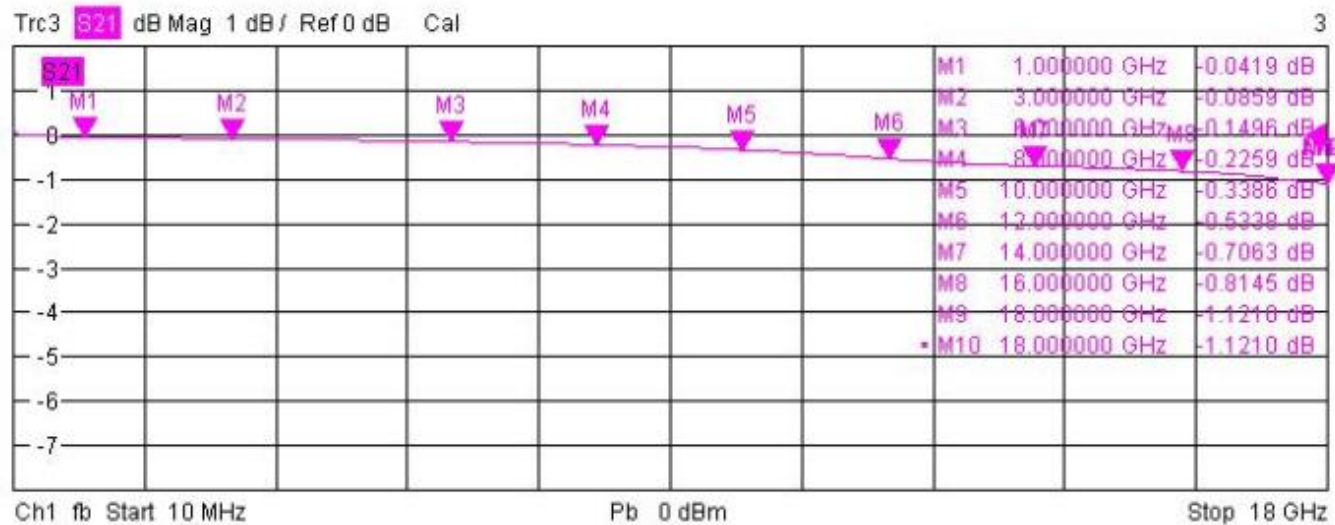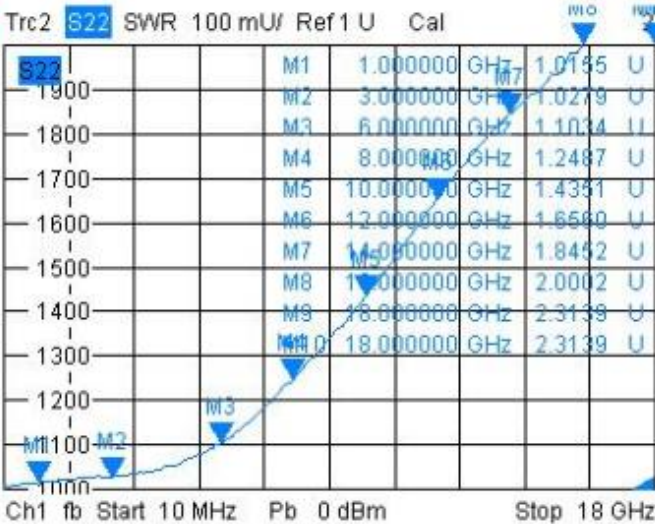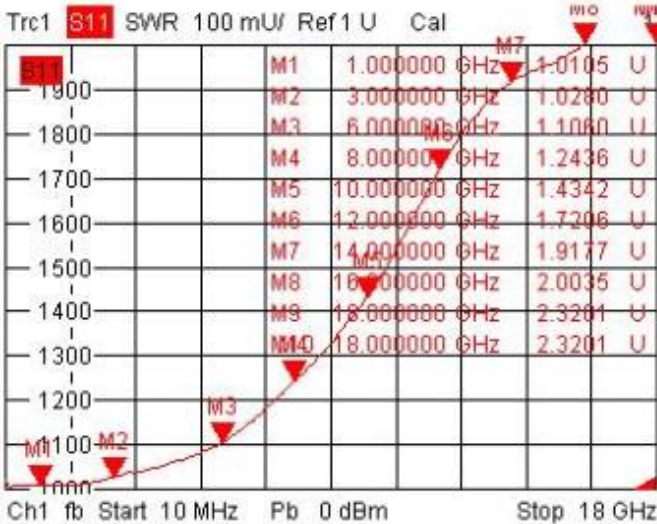

TR1: IN PORT VSWR(S11), TR2: OUT PORT VSWR(S22), TR3: Insertion Loss (S21)