
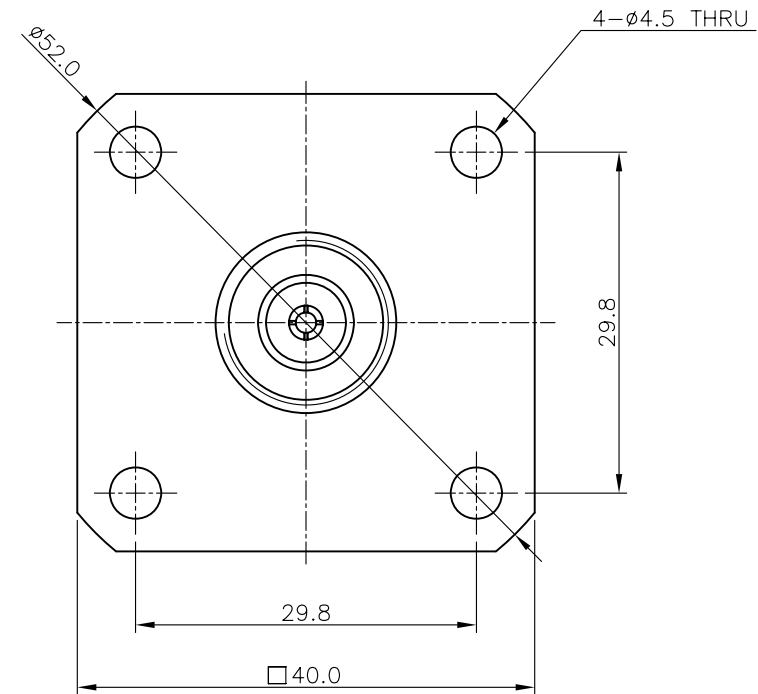


REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
IR	Initial Registration	I.C.KIM	I.C.KIM	2013.01.09.

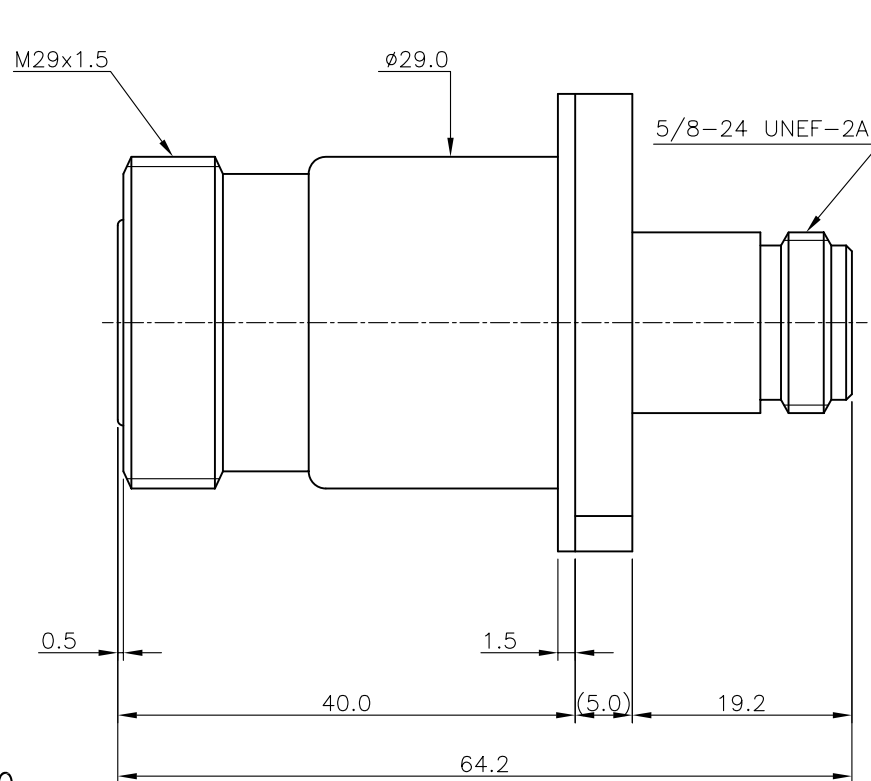

*Note

1. 완제품 조립후 양쪽 END CAP은 필히 PLASTIC CAP (WHITE) 적용 할 것.

* 전기적 특성

1	Frequency range	800 ~ 2200MHz	
2	Impedance	50ohm NOMINAL	
3	V.S.W.R	1.15 : 1 (Max)	
4	Insertion loss	-0.1dB (Min)	
5	PIMD (-43dBm / 2 tone)	CDMA (869~894MHz)	3차: -150dBc (Max)
		WCDMA (2110~2170MHz)	3차: -150dBc (Max)

※내전압 검사 할 것

7	INSULATOR	1	TEFLON		DIN01482-N/1
6	INSULATOR	1	TEFLON		DIN00646-N/1
5	GASKET	1	NBR	Black	DGK00197-N/1
4	CONTACT	1	MBsBD	Silver Plate 3μm	DCT02743-5/1
3	CONTACT	1	BeCu	Silver Plate 3μm	DCT01872-5/2
2	CONTACT	1	BeCu	Silver Plate 3μm	DCT02680-5/1
1	BODY	1	MBsBD	SUCO Plate 3μm	DAD00238-5/1
NO.	DESCRIPTION	Q'TY	MATERIAL	PLATING	CODE

TOLERANCE	Decimal ±0.1	DATE 2013. 01. 10.		 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017	
	Angle ±1°	APPROVED BY	I.C.KIM		
MATERIAL	-	CHECKED BY	E.H.KIM	KJ COMTECH CO.,LTD. TITLE 7/16DIN50J-H4-N50J ADAPTOR	
		DRAWN BY	I.C.KIM		
FINISH	-	SCALE	1.5/1	UNIT	mm
				A4 DWG NO. AD00386-7/3 REVISION I R SHEET 1 of 1	