


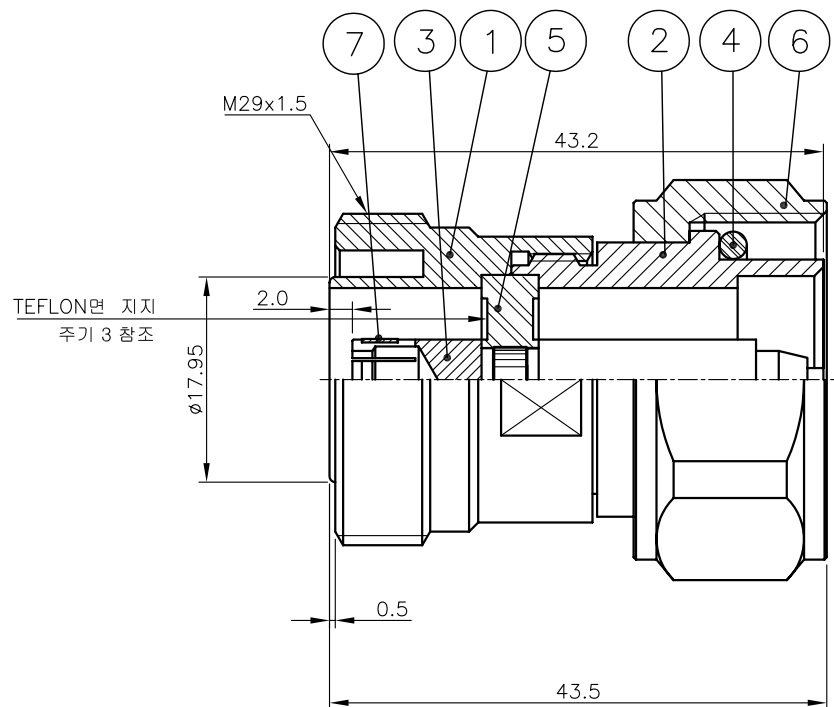

* 주기

REVISION		
REV	DESCRIPTION	DATE
1R	Initial Registration	2010. 07. 19.

1	Frequency range	DC ~ 5GHz	
2	Impedance	50Ω NOMINAL	
3	V.S.W.R	1.1 : 1 max @ 3GHz 1.2 : 1 max @ 6GHz	
4	Insertion Loss	-0.2dB min	
5	PIMD-DIN TERM (-43dBm / 2 tone)	CDMA	5 $\bar{\alpha}$: -160dBc max
		WCDMA	3 $\bar{\alpha}$: -150dBc max

7	SPRING RING	1	BeCu	Silver Plate 7μm	DSR01054-5/2
6	COUPLING CAP	1	MBsBD	SUCO Plate	DCU00078-5/1 (K5015)
5	INSULATOR	1	TEFLON	White	DIN01395-N/1
4	GASKET	1	SILICONE	RED	DGK00054-N/1 (G5006)
3	CONTACT	1	MBsBD	Silver Plate 7μm	DAC00208-5/1
2	BODY(DIN M)	1	MBsBD	SUCO Plate 3μm	DBD02347-5/1
1	BODY(DIN F)	1	MBsBD	SUCO Plate 3μm	DBD02183-5/1
NO.	DESCRIPTION	Q'TY	MATERIAL	PLATING	CODE