


REVISION			DATE
REV	DESCRIPTION		DATE
1R	최초 개정		2009.03.17.

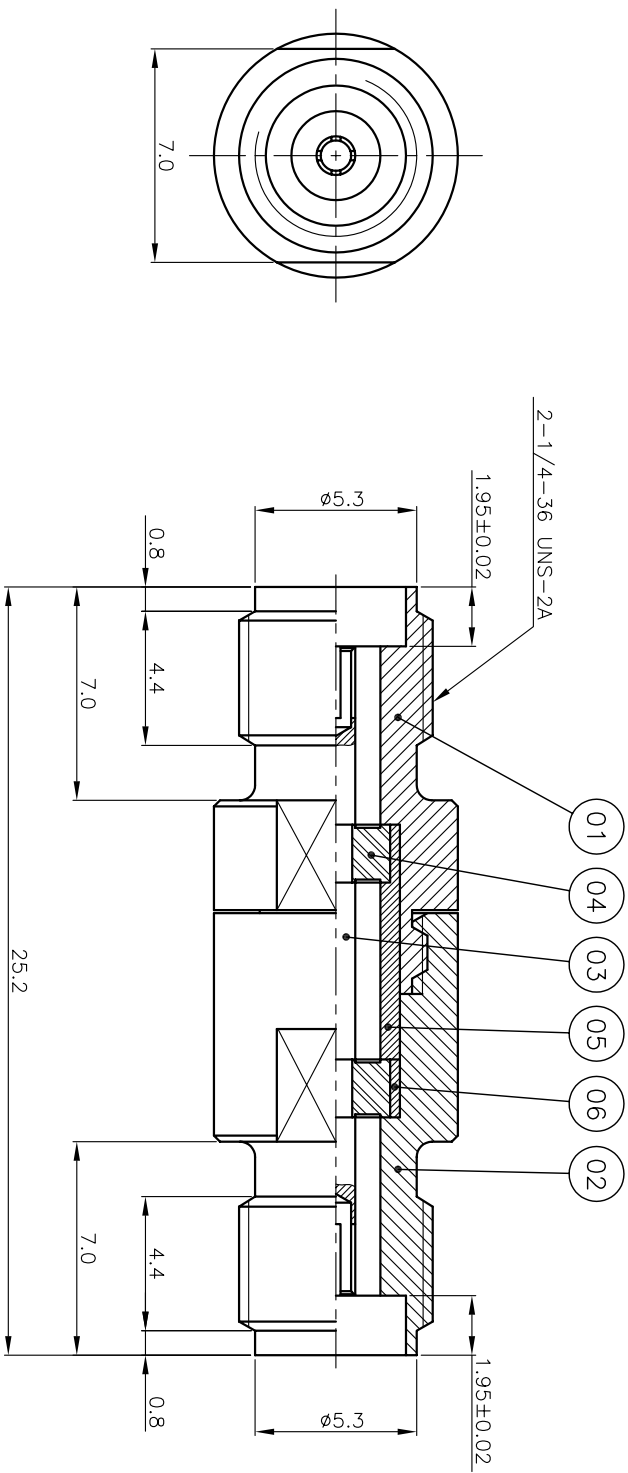

ELECTRICAL SPECIFICATIONS

1	FREQUENCY RANGE	DC ~ 20 GHz
2	IMPEDANCE	50Ω NOMINAL
3	V.S.W.R	1.20 : 1 (Max)
4	INSERTION LOSS	-0.1 dB (Max)

TOLERANCE	Decimal ±0.1	DATE	2009. 03. 17.	
		APPROVED BY	S. J. YOUN	
	MATERIAL	Angle ±1°	CHECKED BY	E. H. KIM
			DRAWN BY	I. C. KIM
	FINISH	SCALE	UNIT	
	4/1	mm		
A4				
DWG NO.		AD000399-7/1		
REVISION		I R SHEET 1 of 1		

6	INSERT	1	MBsBD	Gold Plate	DIS00140-5/1
5	INSERT	1	MBsBD	Gold Plate	DIS00139-5/1
4	INSULATOR	2	TEFLON		DIN01526-N/1
3	CONTACT	1	BeCu	Gold Plate	DAC00160-5/1
2	BODY(B)	1	MBsBD	Gold Plate	DBD02417-5/1
1	BODY(A)	1	MBsBD	Gold Plate	DBD02416-5/1
NO.	DESCRIPTION	Q'TY	MATERIAL	PLATING	CODE
DATE			2009. 03. 17.		
APPROVED BY			S. J. YOUN		
CHECKED BY			E. H. KIM		
DRAWN BY			I. C. KIM		
TITLE			SMAJ-SMAJ ADAPTOR (DC ~ 20GHz)		
FINISH			SCALE		
4/1			mm		
					
					



KJ
COMTECH

RF & MICROWAVE
TECHNOLOGY
Tel : 82-32-347-8015
Fax : 82-32-347-8017

KJ COMTECH CO., LTD.