


REVISION		
REV	DESCRIPTION	DATE
1	최초 개정	2010.03.11.

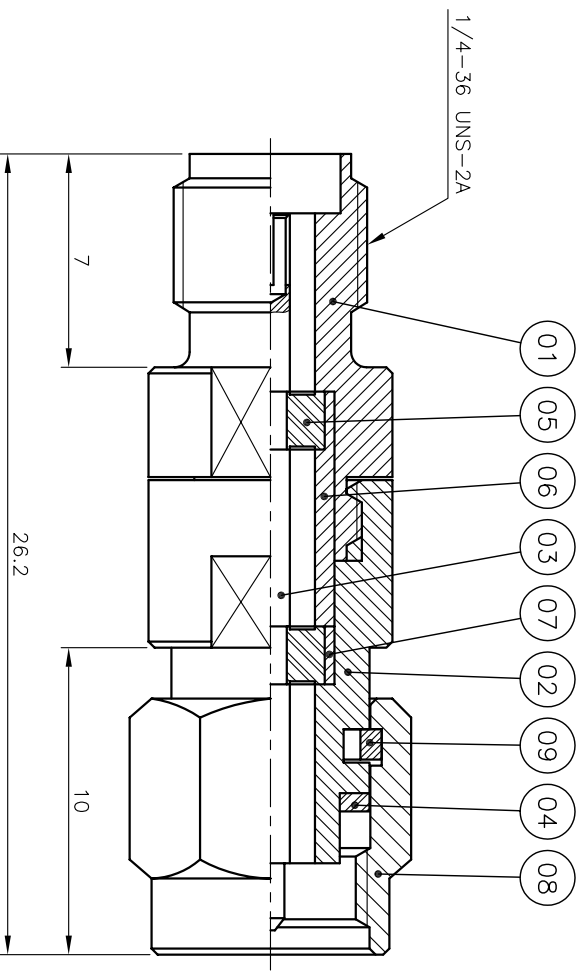

ELECTRICAL SPECIFICATIONS

1	FREQUENCY RANGE	DC ~ 20 GHz
2	IMPEDANCE	50Ω NOMINAL
3	V.S.W.R	1.20 : 1 (Max)
4	INSERTION LOSS	-0.1 dB (Max)

TOLERANCE	Decimal ±0.1	DATE	2010. 03. 11.	
		APPROVED BY	Y.H.CHOI	
	Angle ±1°	CHECKED BY		
	MATERIAL	DRAWN BY		
		SCALE	UNIT	
FINISH	4/1	mm		
A4				
DWG NO.		AD00400-7/1		
REVISION		R SHEET 1 of 1		

9	SPRING RING	1	SUS	부동태차리	DSF00002-5/1
8	COUPLING CAP	1	MSBD	Gold Plate	DCU00005-5/1
7	INSERT	1	MSBD	Gold Plate	DIS00140-5/1
6	INSERT	1	MSBD	Gold Plate	DIS00139-5/1
5	INSULATOR	2	TEFLON		DIN01526-N/1
4	GASKET	1	SILICONE RUB		DGK00004-N/1
3	CONTACT	1	BeCu	Gold Plate	DAC00161-5/1
2	BODY(B)	1	MSBD	Gold Plate	DBD02421-5/1
1	BODY(A)	1	MSBD	Gold Plate	DBD02416-5/1
NO.	DESCRIPTION	Q'TY	MATERIAL	PLATING	CODE



KU COMTECH
KU COMTECH CO.,LTD.

RF & MICROWAVE
TECHNOLOGY
Tel : 82-32-947-8015
Fax : 82-32-947-8017

TITLE

SMAJ-SMAP ADAPTOR
(DC ~ 20GHz)