


REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
IR	Initial Registration	D.W.KANG	J.H.YOUN	2009. 12. 13.
1	[설번No.201712-0010] 조립성 개선으로 인한 BODY 및 PIN 낙시바늘 추가	S.Y.EUN	I.C.KIM	2017. 12. 27.

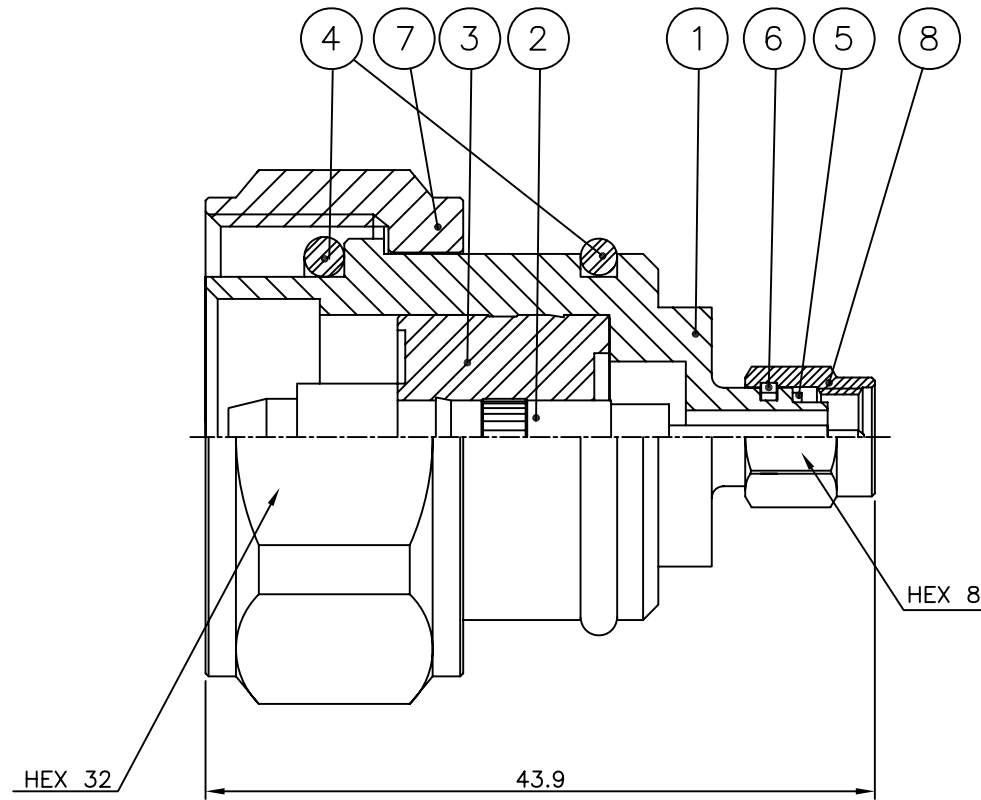

* 전기적 특성

1	Frequency range	DC ~ 6GHz	
2	Impedance	50Ω NOMINAL	
3	V.S.W.R	1.1: 1 max @ 3GHz 1.2: 1 max @ 6GHz	
4	Insertion Loss	-0.2dB min	
5	PIMD-DIN TERM (-43dBm / 2 tone)	CDMA	5차 : -160dBc max
		WCDMA	3차 : -150dBc max

8	CAP	1	MBsBD	Nickel Plate	DCU00005-5/2
7	CAP	1	MBsBD	Nickel Plate	DCU00078-5/2
6	SPRING RING	1	SUS	부동태처리	DSR00002-5/1
5	GASKET	1	SILICONE RUB		DGK00004-N/1
4	GASKET	2	SILICONE RUB		DGK00054-N/1
3	INSULATOR	1	TEFLON		DIN01700-N/1
2	CONTACT	1	MBsBD	Silver(7μm)	DAC00193-5/1
1	BODY	1	MBsBD	SUCO(3μm)	DAD00198-5/1
NO.	DESCRIPTION	Q'TY	MATERIAL	PLATING	CODE

TOLERANCE	Decimal	DATE 2017. 12. 27.		 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017
	Angle	APPROVED BY	I.C.KIM	
MATERIAL	-	CHECKED BY		KJ COMTECH CO.,LTD. TITLE 7/16 DIN50 (P) SMA50 (P) ADAPTOR
		DRAWN BY	S.Y.EUN	
FINISH	-	SCALE	UNIT	A4 DWG NO. AD00421-7/1 REVISION 1 SHEET 1 of 1
		2/1	mm	