


REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
IR	Initial Registration	D.W.KANG	J.H.YOUN	2009. 12. 03.
1	[설번처리No.201111-0005] BODY,PIN낙시바늘 추가 설번	I.C.KIM	J.H.YOUN	2011. 11. 28.

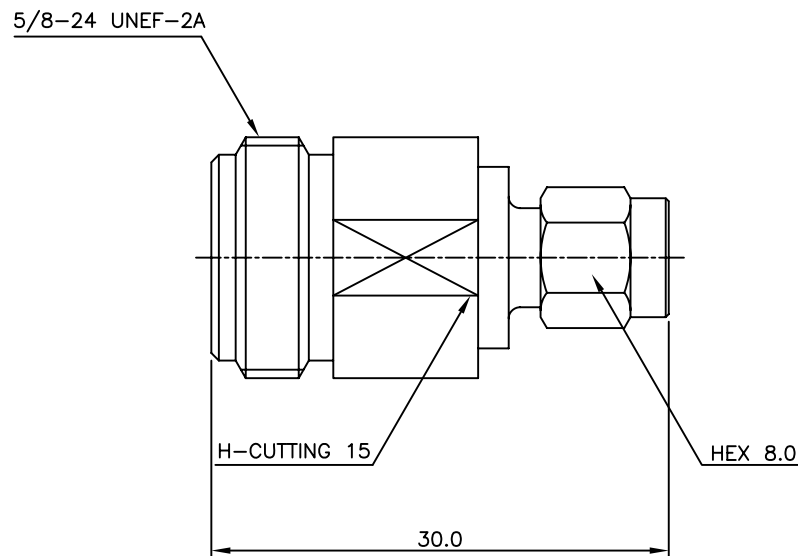


* 전기적 특성

1	Frequency range	DC ~6GHz
2	Impedance	50Ω NOMINAL
3	V.S.W.R	1.2 : 1 max @ 6GHz

주 기

- 측정방법
- N / E-CAL 진행
- AD00424 아답터를 상대물로 측정

6	COUPLING CAP	1	MBsBD C3604BD-F	Nickel Plate	DCU00005-5/2
5	SPRING RING	1	Pasivated	부동태 처리	DSR00002-5/1
4	GASKET	1	SILICONE RUB		DGK00004-N/1
3	INSULATOR	1	TEFLON		DAI00106-N/2 DAI00106-N/1
2	CONTACT	1	BeCu C17300	Silver(7μm)	DAC00195-5/2
1	BODY	1	MBsBD C3604BD-F	SUCO(3μm)	DAD00200-5/2 DAD00200-5/1
NO.	DESCRIPTION	Q'TY	MATERIAL	PLATING	CODE

TOLERANCE	Decimal	DATE 2011. 11. 18.			 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017			
	Angle	APPROVED BY	J.H.YOUN					
MATERIAL	-	CHECKED BY			TITLE N50(J)-SMA50(P) ADAPTOR			
		DRAWN BY	I.C.KIM					
FINISH	-	SCALE 2/1	UNIT mm		A4	DWG NO.	AD00423-7/2	
							REVISION	1