


REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
IR	Initial Registration	D.W.KANG	J.H.YOUN	2009. 12. 03.
1	[설변처리No.201111-0005] BODY,PIN낙시바늘 추가 설변	I.C.KIM	J.H.YOUN	2011. 11. 28.
2	[설변처리No.201912-0009] 핀 날링 제거 및 면취 삭제	I.C.KIM		2019. 12. 19.

5/8-24 UNEF-2A

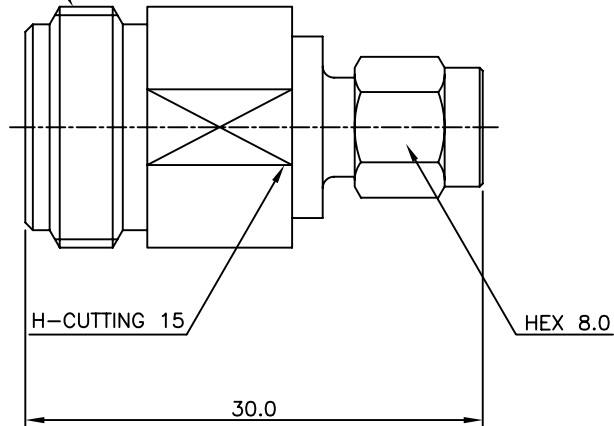

* 전기적 특성

1	Frequency range	DC ~16GHz
2	Impedance	50Ω NOMINAL
3	V.S.W.R (Max)	1.25 : 1
4	Insertion Loss (Min)	-0.5 dB

주 기

1. 측정방법

- N / E-CAL 진행
- AD00424 아답터를 상대물로 측정

6	COUPLING CAP	1	MBsBD C3604BD-F	Nickel Plate	DCU00005-5/2
5	SPRING RING	1	Pasivated	부동태 처리	DSR00002-5/1
4	GASKET	1	SILICONE RUB		DGK00004-N/1
3	INSULATOR	1	TEFLON		DAI00106-N/2 DAI00106-N/1
2	CONTACT	1	BeCu C17300	Silver(3μm)	DAC00195-5/6 DAC00195-5/2
1	BODY	1	MBsBD C3604BD-F	SUCO(3μm)	DAD00200-5/2 DAD00200-5/1
NO.	DESCRIPTION	Q'TY	MATERIAL	PLATING	CODE

TOLERANCE	Decimal	DATE 2019. 12. 19.		 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017
	Angle	APPROVED BY		
MATERIAL	-	CHECKED BY		TITLE N50(J)-SMA50(P) ADAPTOR
		DRAWN BY	I.C.KIM	
FINISH	-	SCALE	UNIT	DWG NO. AD00423-7/4 REVISION 2 SHEET 1 of 1
		2/1	mm	

A4