


AD00423-7/4



N (J) SMA(3.5mm) (P)
ST L:30mm
■ N-PIN-6/CUT
■ VSWR ~16.0GHz 1.2:1
BO/SU3 PI/Si3 CAP/NI

AD00423-7/4

Frequency	
Insertion Loss	
VSWR	
Impedance	■ 50Ω □ 75Ω
Temperature	-40℃ ~ 125℃

S11/S22/S21(SWR, SWR, dB)

■ _2GHz	- 1.04, 1.04, 0.05
■ _4GHz	- 1.05, 1.04, 0.07
■ _6GHz	- 1.05, 1.07, 0.09
■ _8GHz	- 1.04, 1.05, 0.10
■ 10GHz	- 1.08, 1.08, 0.12
■ 12GHz	- 1.09, 1.10, 0.13
■ 14GHz	- 1.06, 1.05, 0.14
■ 16GHz	- 1.07, 1.06, 0.15

■ 18GHz	- 1.34, 1.33, 0.26

► NETWORK ANALYZER

► Test cable

► Test Adaptor


- E5071B (~8.5GHz)
- ZVA50 (~50GHz)

- 2.4mm Male to 2.4mm Male 50GHz Cable)


- 2.4mm (J) to 2.92mm (P) AD00646-7/2
- N (P) SMA (J) Agilent사
- 2.4mm (J) to 2.92mm (J) AD00666-7/1



Trc1 S11 SWR 100 mU/ Ref1 U Cal

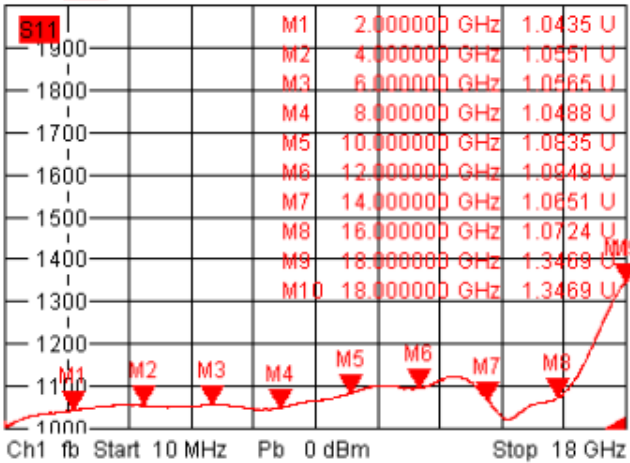

Trc3 S21 dB Mag 1 dB / Ref 0 dB Cal

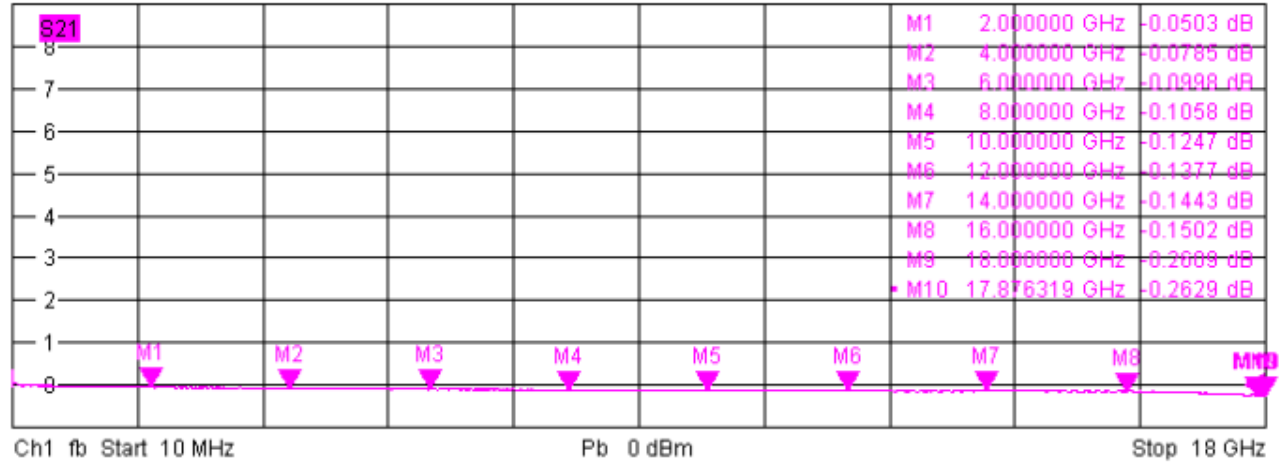

TR1: IN PORT VSWR(S11), TR2: OUT PORT VSWR(S22), TR3: Insertion Loss (S21)