


AD00434-7/1

D/CUT-5.9



SMA (J) SMA (J) BH
HEX-11 L:21.4mm(5.9-2.5-13)
BO/GO, PI/GO

AD00434-7/1

Frequency	
Insertion Loss	
VSWR	
Impedance	■ 50Ω □ 75Ω
Temperature	-40℃ ~ 125℃

S11/S22/S21(SWR, SWR, dB)


■_1GHz	-	1.02	1.02	0.01
■_3GHz	-	1.05	1.05	0.03
■_6GHz	-	1.03	1.03	0.05
■_8GHz	-	1.11	1.11	0.08
■10GHz	-	1.13	1.14	0.10
■12GHz	-	1.05	1.06	0.10
■14GHz	-	1.09	1.08	0.15

■16GHz	-	1.21	1.23	0.27
■18GHz	-	1.11	1.26	0.41
■MaX_--	-	1.21	1.27	0.42


► NETWORK ANALYZER ► Test cable ► Test Adaptor

- ☐ E5071B (~8.5GHz)
- ☒ ZVA50 (~50GHz)
- ☒ 2.4mm Male to 2.4mm Male
50GHz Cable


Trc1 S11 SWR 100 mU/ Ref1 U Cal

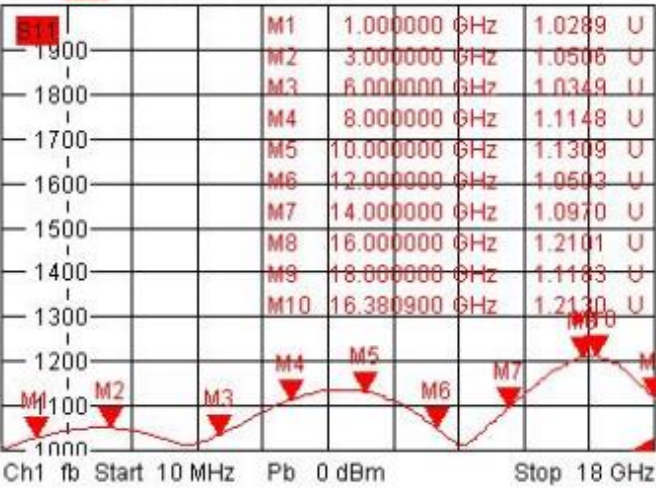

Trc2 S22 SWR 100 mU/ Ref1 U Cal

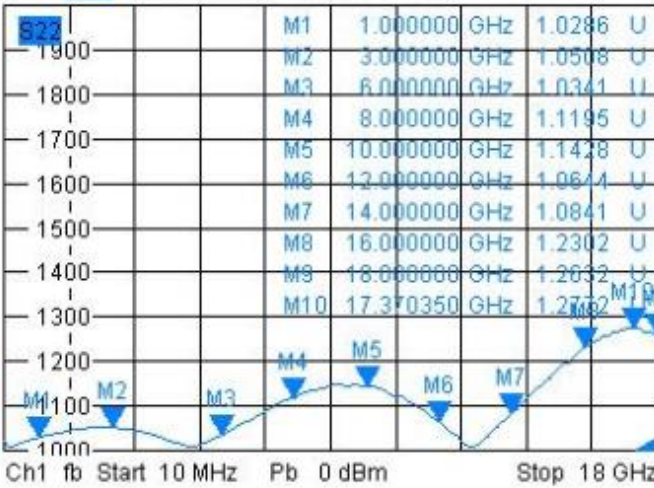

Trc3 S21 dB Mag 1 dB/ Ref0 dB Cal

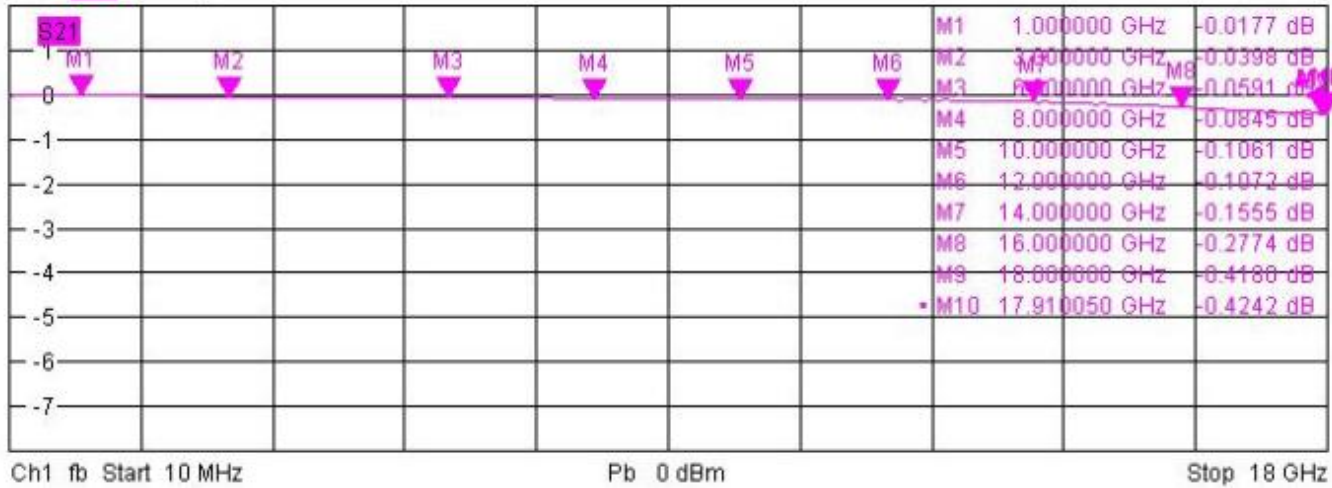

TR1: IN PORT VSWR(S11), TR2: OUT PORT VSWR(S22), TR3: Insertion Loss (S21)