


AD00437-7/1

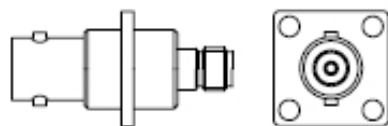

BNC (J) SMA (J) 4 HOLE
□17.5-12.7-2.6
L:33.5mm(16.7-1.8-15)
BO/NI, PI/GO

AD00437-7/1

Frequency	
Insertion Loss	
VSWR	
Impedance	■ 50Ω □ 75Ω
Temperature	-40℃ ~ 125℃

S11/S22/S21(SWR, SWR, dB)

■_1.0GHz - 1.10, 1.10, 0.03
■_2.0GHz - 1.12, 1.11, 0.09
■_3.0GHz - 1.09, 1.08, 0.13
■_4.0GHz - 1.18, 1.05, 0.38

■_5.0GHz - 1.32, 1.26, 0.28
■_6.0GHz - 1.35, 1.29, 0.23
■_7.0GHz - 1.31, 1.30, 0.24
■_8.0GHz - 1.41, 1.36, 0.33

► NETWORK ANALYZER

► Test cable

► Test Adaptor

■ E5071B (~8.5GHz)

■ N Male to SMA Male

■ BNC (P) SMA (J) ST

□ ZVA50 (~50GHz)

10GHz Cable (CF00540-7/1)

TR1: IN PORT VSWR(S11), TR2: OUT PORT VSWR(S22), TR3: Insertion Loss (S21)

