
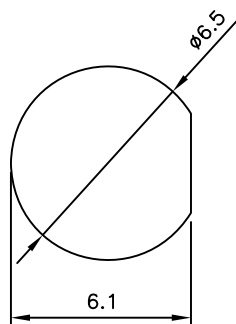



REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
IR	Initial Registration	I.C.KIM	Y.H.CHOI	2010.08.17.
↑	[설번No.201806-0005] 조립성 개선으로 인한 HOOK 구조 변경	S.Y.EUN	I.C.KIM	2018.06.12.

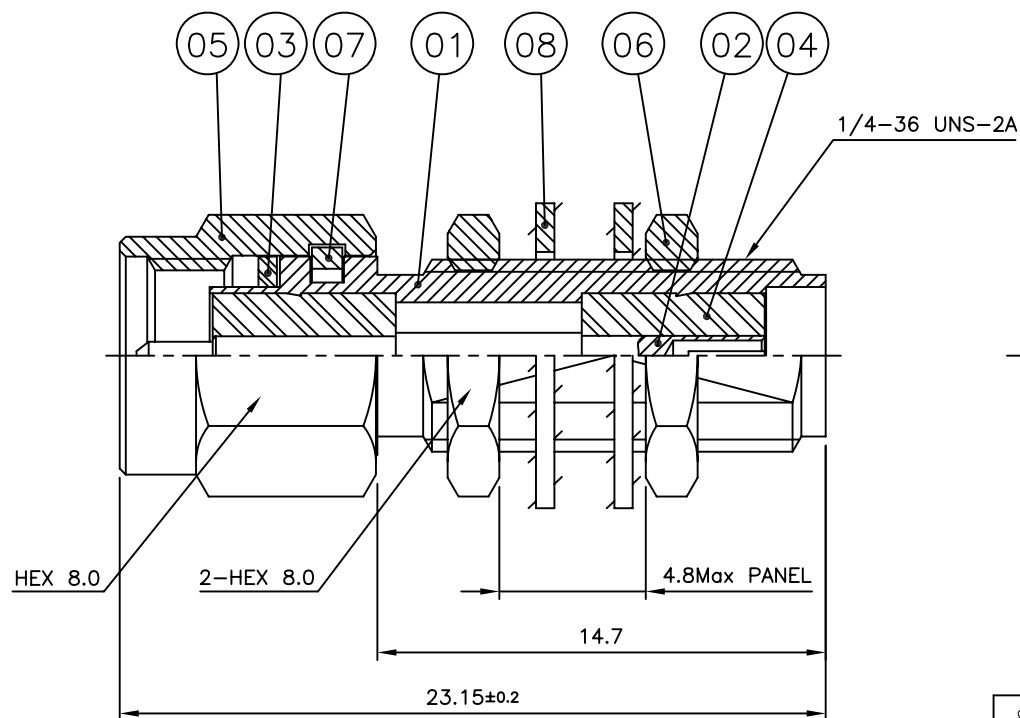

MOUNTING HOLE

* ELECTRICAL SPECIFICATIONS

Frequency Range : DC~10 GHz

Insertion Loss (Max.) : 0.2 dB

V.S.W.R (Max.) : 1.2 : 1

Impedance : 50Ω

Operating Temperature : -40°C ~ +70°C

8	WASHER	2	BsS	Nickel Plated	DWA00005-5/3
7	SPRING RING	1	SUS	Passivated	DSR00002-5/1
6	NUT	2	MBsBD C3604BD-F	Nickel Plated	DNT00025-5/5
5	CAP	1	MBsBD C3604BD-F	Nickel Plated	DCU00005-5/2
4	INSULATOR	2	TEFLON		DIN02133-N/1
3	GASKET	1	SILICONE RUB		DGK00004-N/1
2	CONTACT	1	BeCu C17300	Gold Plated	DAC00211-5/2 DAC00211-5/1
1	BODY	1	MBsBD C3604BD-F	Nickel Plated	DAD00215-5/1
NO.	DESCRIPTION	Q'TY	MATERIAL	PLATING	CODE

TOLERANCE	Decimal	DATE 2018. 06. 12.		 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017
	Angle	APPROVED BY	I.C.KIM	
MATERIAL		CHECKED BY		KJ COMTECH CO.,LTD. TITLE SMA50 (J) SMA50 (P) BH ADAPTOR
		DRAWN BY	S.Y.EUN	
FINISH		SCALE	4/1	A4 DWG NO. AD00442-7/1 REVISION 1 SHEET 1 of 1
		UNIT	mm	