


AD00442-7/1



SMA (J) SMA (P) BH
L:23.1mm(14.7-8.45)
BO/NI, PI/GO, CAP/NI

AD00442-7/1

Frequency	
Insertion Loss	
VSWR	
Impedance	■ 50Ω □ 75Ω
Temperature	-40℃ ~ 125℃

S11/S22/S21(SWR, SWR, dB)

■_1GHz	-	1.00	1.00	0.03
■_3GHz	-	1.03	1.02	0.07
■_6GHz	-	1.03	1.05	0.13
■_8GHz	-	1.09	1.09	0.17
■10GHz	-	1.09	1.10	0.20
■12GHz	-	1.06	1.09	0.21
■14GHz	-	1.06	1.06	0.23
■16GHz	-	1.10	1.10	0.25
■18GHz	-	1.20	1.18	0.31
■MaX__	-	1.20	1.18	0.31

► NETWORK ANALYZER

► Test cable


► Test Adaptor

□ E5071B (~8.5GHz)

■ 2.4mm Male to 2.4mm Male

■ ZVA50 (~50GHz)

50GHz Cable

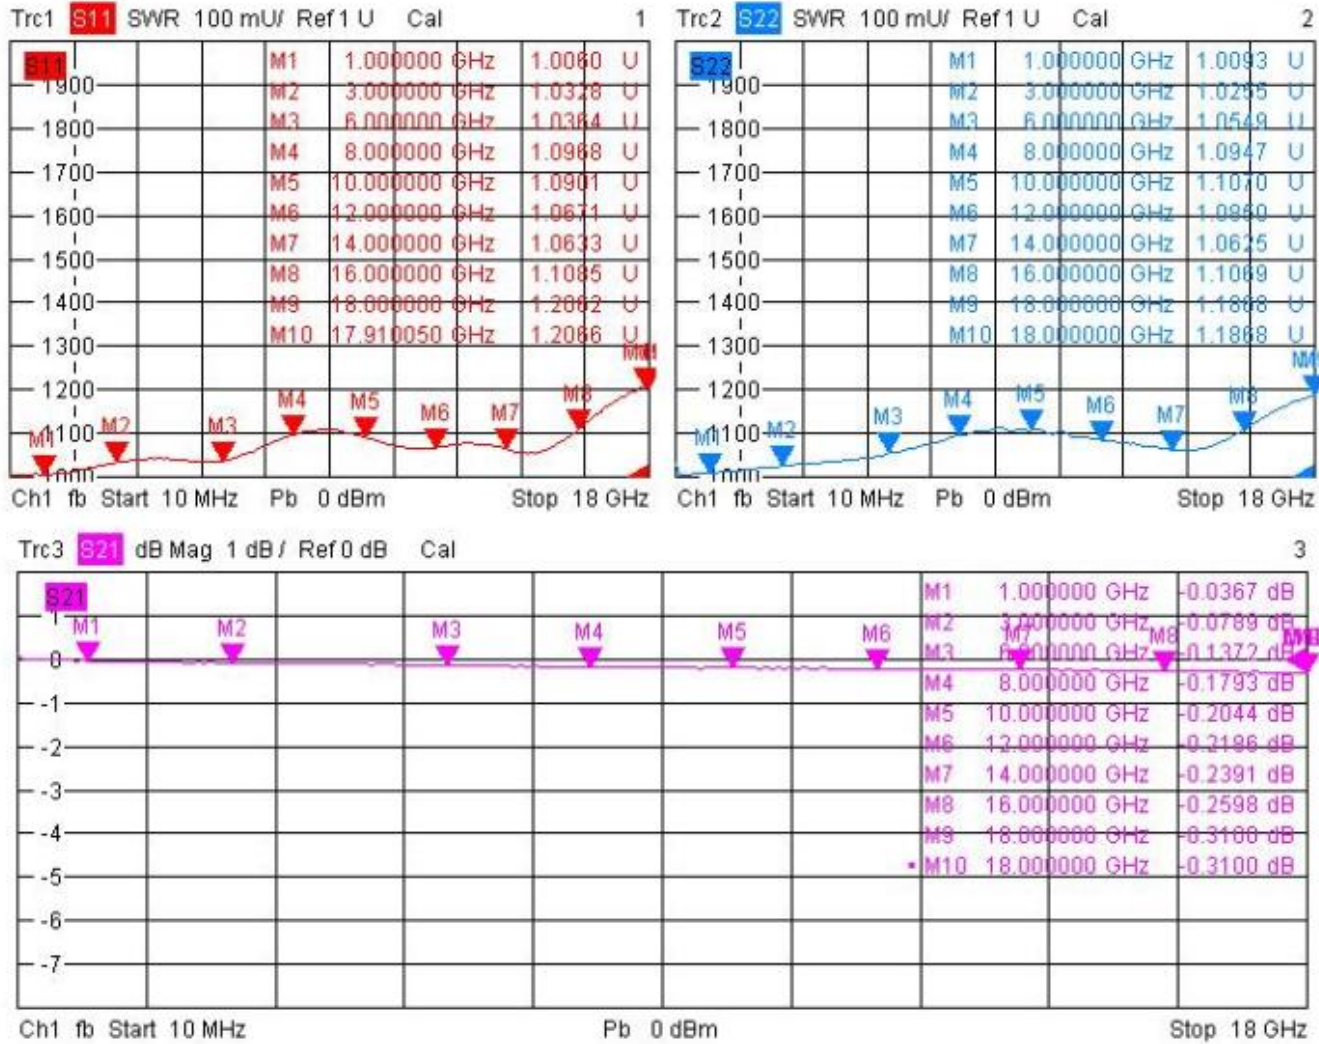

TR1: IN PORT VSWR(S11), TR2: OUT PORT VSWR(S22), TR3: Insertion Loss (S21)