


AD00449-7/1

AD00449-7/1

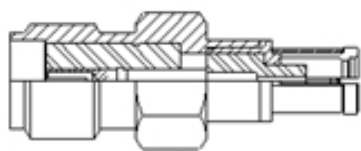

SMA (J)
SMT (P) **SPRING-X**
ST L:19.5mm
BO/GO, PI/GO

Frequency	
Insertion Loss	
VSWR	
Impedance	■ 50Ω □ 75Ω
Temperature	-40°C ~ 125°C

S11/S22/S21(SWR, SWR, dB)

■	_1,0GHz	- 1,09, 1,09, 0,18
■	_2,0GHz	- 1,18, 1,19, 0,20

■	_3,0GHz	- 1,23, 1,23, 0,20
■	_4,0GHz	- 1,25, 1,24, 0,23
■	_5,0GHz	- 1,23, 1,25, 0,18
■	_6,0GHz	- 1,16, 1,14, 0,15
■	_7,0GHz	- 1,16, 1,17, 0,12
■	_8,0GHz	- 1,30, 1,30, 0,11

► NETWORK ANALYZER ► Test cable

► Test Adaptor

■ E5071B (~8.5GHz)

□ ZVA50 (~50GHz)

TR1 : IN PORT VSWR(S11), TR2 : OUT PORT VSWR(S22), TR3: Insertion Loss (S21)

