


REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
IR	Initial Registration	S.Y.EUN	I.C.KIM	2020.03.24.
1	DBB은뎡부 은납링 적용 구조로 변경	S.H.KIM		2023.11.30.

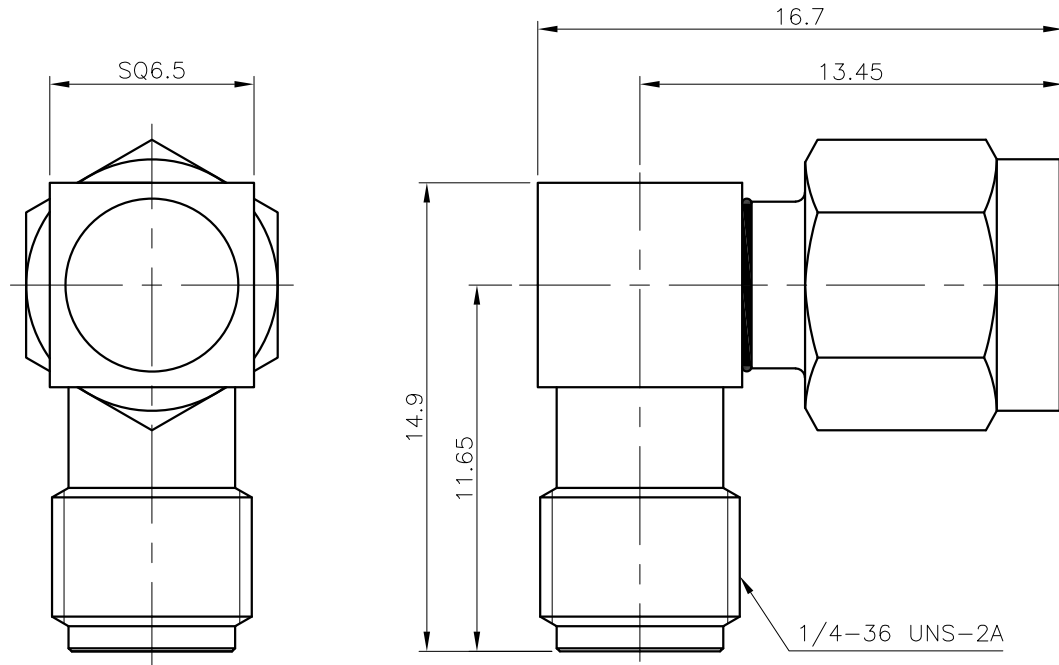

ELECTRICAL DATA

1	Frequency range	DC ~ 6.0 GHz
2	IMPEDANCE	50Ω NOMINAL
3	V.S.W.R	1.2 : 1 max
4	Insertion Loss	-0.2dB min

8	COVER	1	MBsBD C3604BD-F	Gold Plate	DCO00114-5/2
7	JACK	1	BeCu C17300	Gold Plate	DJA00011-5/1
6	CAP	1	MBsBD C3604BD-F	Gold Plate	DCU00004-5/1
5	INSULATOR	1	TEFLON		DIN03130-N/1
4	INSULATOR	1	TEFLON		DIN00154-N/1
3	CONTACT	1	BeCu C17300	Gold Plate	DCT01464-5/1
2	CONTACT	1	MBsBD C3604BD-F	Gold Plate	DCT04113-5/1
1	1-2 BODY (B)	1	MBsBD C3604BD-F	Gold Plate	DBB00500-5/1
1	1-1 BODY (A)	1	MBsBD C3604BD-F		DBD04609-1/1
NO.	DESCRIPTION	Q'TY	MATERIAL	PLATING	CODE

TOLERANCE	Decimal ±0.2	DATE 2023. 11. 30.			 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017
	Angle ±1°	APPROVED BY			
MATERIAL _____		CHECKED BY		TITLE SMA50 (J) SMA (Push) (P) RA ADAPTOR	
		DRAWN BY S.H.KIM			
FINISH _____		SCALE 4/1	UNIT mm	 A4	DWG NO. AD00451-7/4
					REVISION 1