


AD00467-7/1

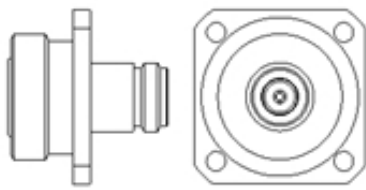

7/16 DIN (J) N (J) 4 HOLE
□40-29.8-4.5
L:37mm(15-4-18)
BODY/Nickel PIN/Silver

AD00467-7/1

Frequency	
Insertion Loss	
VSWR	
Impedance	■ 50Ω □ 75Ω
Temperature	-40℃ ~ 125℃

S11/S22/S21(SWR, SWR, dB)

■_1.0GHz	- 1.04, 1.04, 0.01
■_2.0GHz	- 1.02, 1.02, 0.02
■_3.0GHz	- 1.02, 1.04, 0.01
■_4.0GHz	- 1.19, 1.19, 0.53
■_5.0GHz	- 1.14, 1.13, 0.02
■_6.0GHz	- 1.03, 1.13, 0.04

■_7.0GHz	- 1.29, 1.02, 0.01
■_8.0GHz	- 1.38, 1.28, 0.03

► NETWORK ANALYZER

► Test cable

► Test Adaptor

■ E5071B (~8.5GHz)

■ N Male to N Male

■ 7/16 (P) N (J) AD00377-7/4

□ ZVA50 (~50GHz)

10GHz Cable (CF00539-7/1)

TR1: IN PORT VSWR(S11), TR2: OUT PORT VSWR(S22), TR3: Insertion Loss (S21)

