


AD00490-7/1

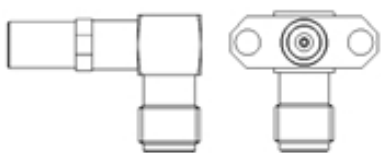

MCX (J) SMA (J) RA 2 HOLE
2H/5.6-12.2-2.7
MCX/L:19.9 SMA/L:14.85
BO/GO, PI/GO

AD00490-7/1

Frequency	
Insertion Loss	
VSWR	
Impedance	■ 50Ω □ 75Ω
Temperature	-40°C ~ 125°C

S11/S22/S21(SWR, SWR, dB)

■ _1.0GHz	- 1.11, 1.11, 0.23
■ _2.0GHz	- 1.12, 1.11, 0.09
■ _3.0GHz	- 1.03, 1.04, 0.03
■ _4.0GHz	- 1.09, 1.09, 0.02
■ _5.0GHz	- 1.19, 1.20, 0.13
■ _6.0GHz	- 1.07, 1.10, 0.18

■ _7.0GHz	- 1.27, 1.23, 0.31
■ _8.0GHz	- 1.59, 1.54, 0.47

► NETWORK ANALYZER

► Test cable

► Test Adaptor

■ E5071B (~8.5GHz)

□ ZVA50 (~50GHz)

TR1: IN PORT VSWR(S11), TR2: OUT PORT VSWR(S22), TR3: Insertion Loss (S21)

