


AD00491-7/4



SMA (J) SMBL (P)
ST L:22.7mm
BO/NI, PI/GO, CAP/NI

AD00491-7/4

Frequency	
Insertion Loss	
VSWR	
Impedance	☒ 50Ω ☐ 75Ω
Temperature	-40°C ~ 125°C

S11/S22/S21(SWR, SWR, dB)


■ _1.0GHz	- 1.04, 1.04, 0.19
■ _2.0GHz	- 1.06, 1.07, 0.19
■ _3.0GHz	- 1.00, 1.02, 0.21
■ _4.0GHz	- 1.01, 1.02, 0.20
■ _5.0GHz	- 1.04, 1.05, 0.18
■ _6.0GHz	- 1.10, 1.10, 0.10

■ _7.0GHz	- 1.18, 1.20, 0.10
■ _8.0GHz	- 1.19, 1.20, 0.08

► NETWORK ANALYZER ► Test cable ► Test Adaptor

- ☒ E5071B (~8.5GHz)
☐ ZVA50 (~50GHz)

TR1: IN PORT VSWR(S11), TR2: OUT PORT VSWR(S22), TR3: Insertion Loss (S21)

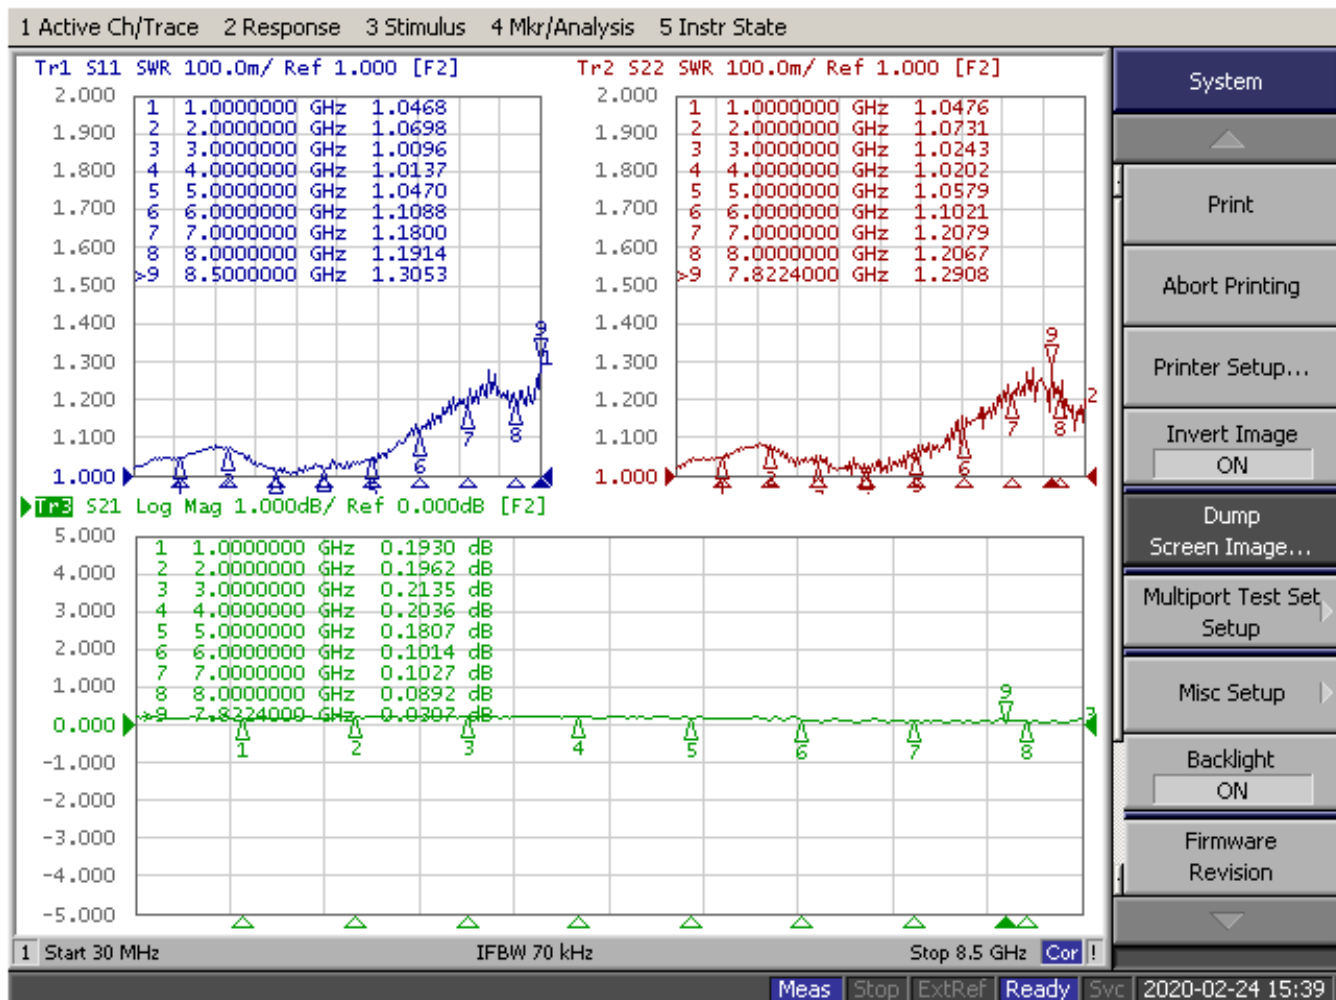

System

Print

Abort Printing

Printer Setup...

Invert Image
ON

Dump Screen Image...

Multiport Test Set Setup

Misc Setup

Backlight
ON

Firmware Revision