
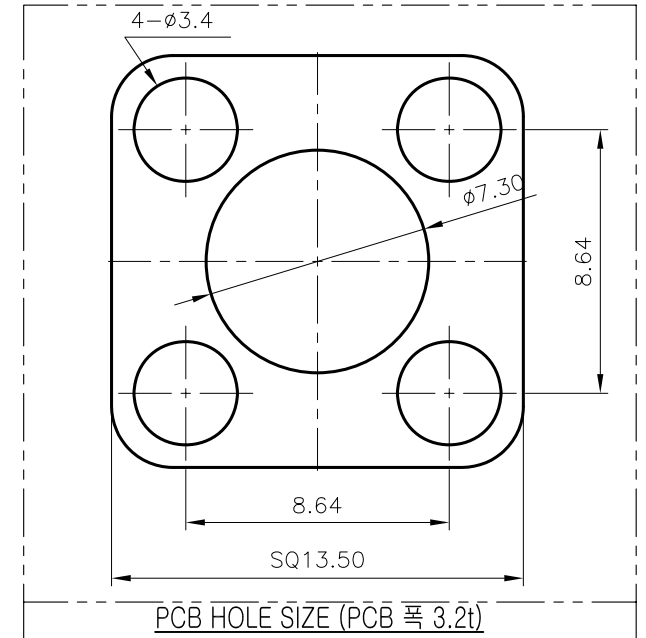
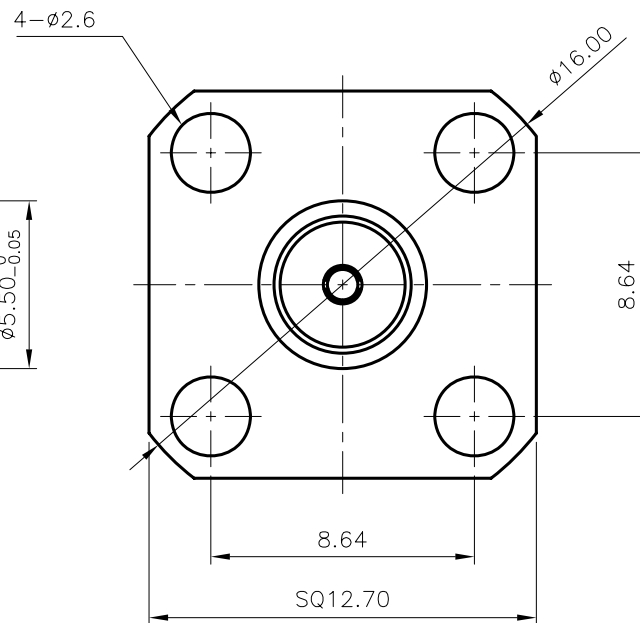


REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
IR	Initial Registration	M.H.SONG	I.C.KIM	2013.10.02.
1	[설번처리 No.201504-0003] BODY, JACK 표준화 치수 적용	H.J.LEE	I.C.KIM	2015.04.22.
2	[설번No.201710-0019]조립시 BURR현상으로 치수변경	S.Y.EUN	I.C.KIM	2017.10.25.
3	[설번No.201804-0015]조립시 BURR발생 개선으로 인한 BOLT 코드 변경	S.Y.EUN	I.C.KIM	2018.04.23.
4	[설번No.201911-0027]역지끼움 후 이탈 개선으로 인한 BOLT 코드 변경	S.Y.EUN	I.C.KIM	2019.11.28.

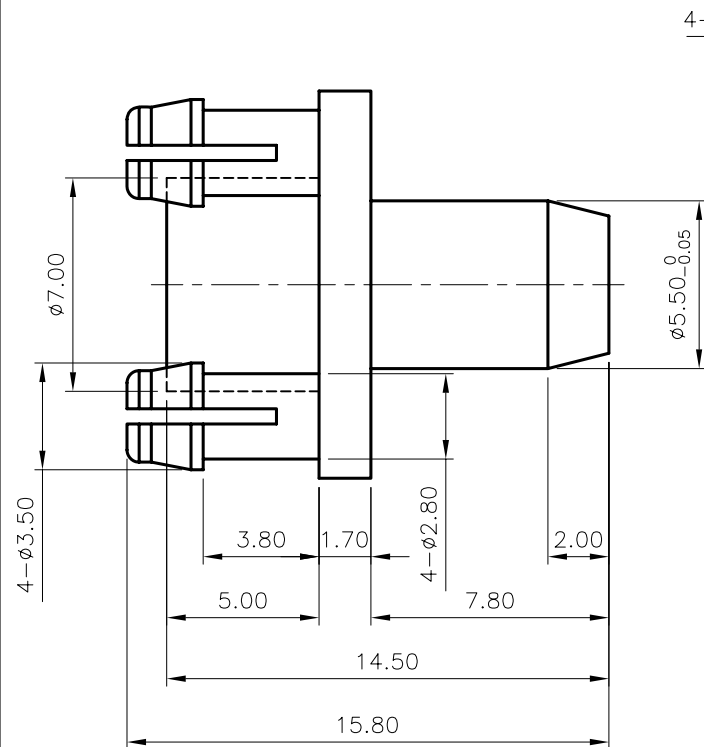

ELECTRICAL DATA

1. IMPEDANCE : 50ohm
2. FREQUENCY RANGE : DC~4GHz
3. VSWR (Max) : 1.2
4. INSERTION LOSS : 0.2dB (Max)

5	JACK	1	MBsBD	Nickel Plate	DJA00159-5/5 DJA00159-5/2
4	BOLT	4	MBsBD	Nickel Plate	DBT01040-5/4 DBT01040-5/3 DBT01040-5/2 DBT01040-5/1
3	INSULATOR	1	TEFLON		DAI00144-N/1
2	CONTACT	1	BeCu	Gold Plate	DAC00261-5/1
1	BODY	1	MBsBD	Nickel Plate	DAD00261-5/2 DAD00261-5/1
NO.	DESCRIPTION	Q'TY	MATERIAL	PLATING	CODE

TOLERANCE	Decimal	DATE 2019. 11. 28.		 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017
	Angle	APPROVED BY	I.C.KIM	
MATERIAL		CHECKED BY		KJ COMTECH CO.,LTD. TITLE SMA trans(ø5.5) (J) SMBL50 (P) 4 HOLE
		DRAWN BY	S.Y.EUN	
FINISH		SCALE	UNIT	A4 DWG NO. AD00492-7/2 REVISION 4 SHEET 1 of 1
		4/1	mm	