


Mating ø5.47



PDM (J) SMA (J)
ST L:23.1mm
BODY/Nickel PIN/Gold

AD00506-7/2

Frequency	
Insertion Loss	
VSWR	
Impedance	■ 50Ω □ 75Ω
Temperature	-40℃ ~ 125℃

S11/S22/S21 (SWR, SWR, dB)

■_1.0GHz	-	1.06,	1.07,	0.03
■_2.0GHz	-	1.07,	1.07,	0.05
■_3.0GHz	-	1.06,	1.06,	0.07
■_4.0GHz	-	1.02,	1.04,	0.08
■_5.0GHz	-	1.09,	1.08,	0.09
■_6.0GHz	-	1.15,	1.15,	0.11
■_7.0GHz	-	1.12,	1.15,	0.11
■_8.0GHz	-	1.05,	1.06,	0.08

► NETWORK ANALYZER


- E5071B (~8.5GHz)
- ZVA50 (~50GHz)
- ZND (~8.5GHz)

► Test cable


- N Male to SMA Male
- 10GHz Cable (CF00540-7/1)

► Test Adaptor

- AD00506
- AD00292

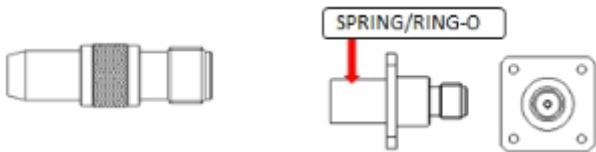

7/17/2020 5:23:38 AM
1328.5170K92-102136-V/a

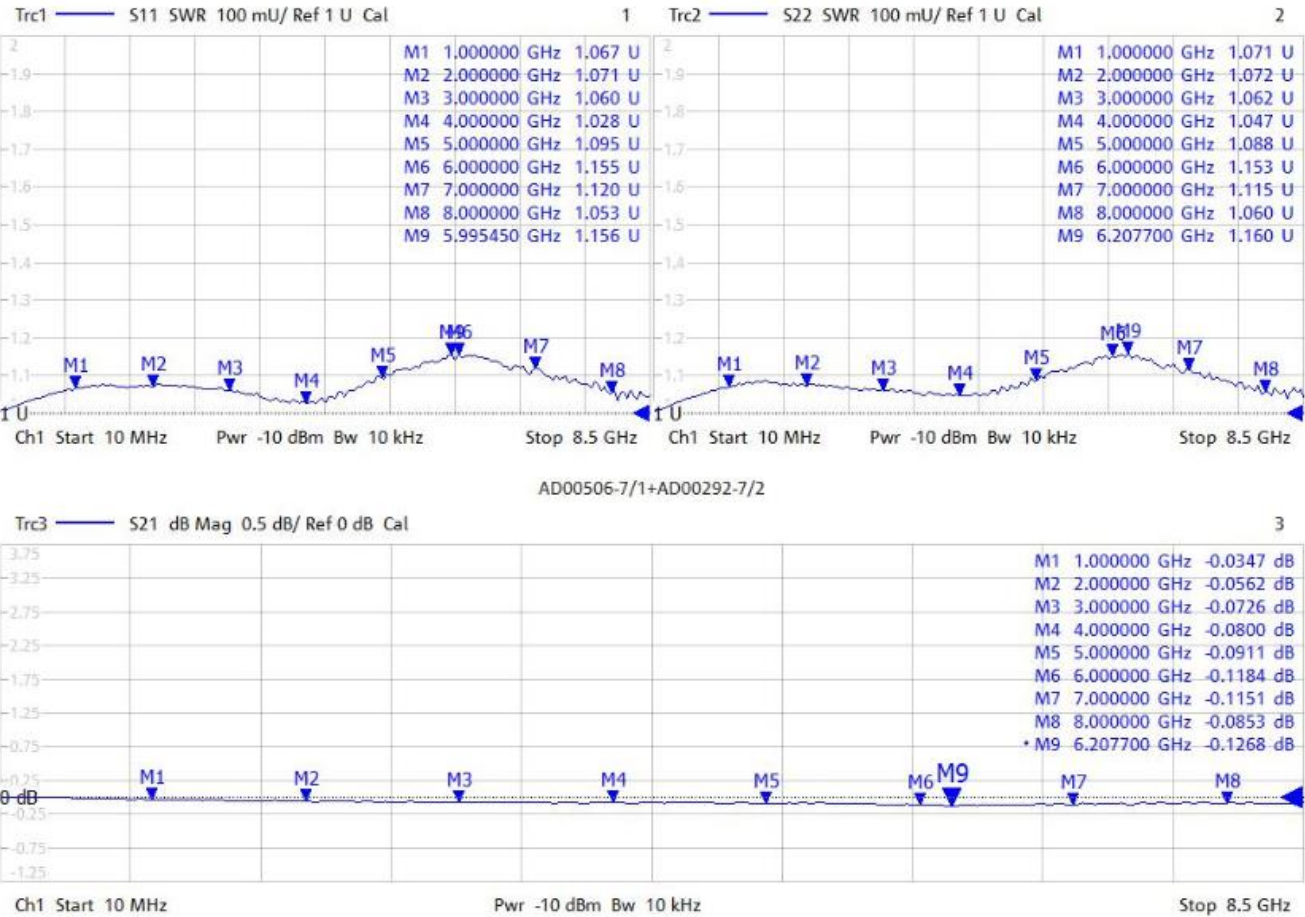

TR1 : IN PORT VSWR(S11), TR2 : OUT PORT VSWR(S22), TR3: Insertion Loss (S21)