
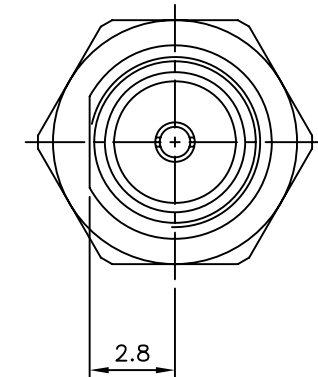
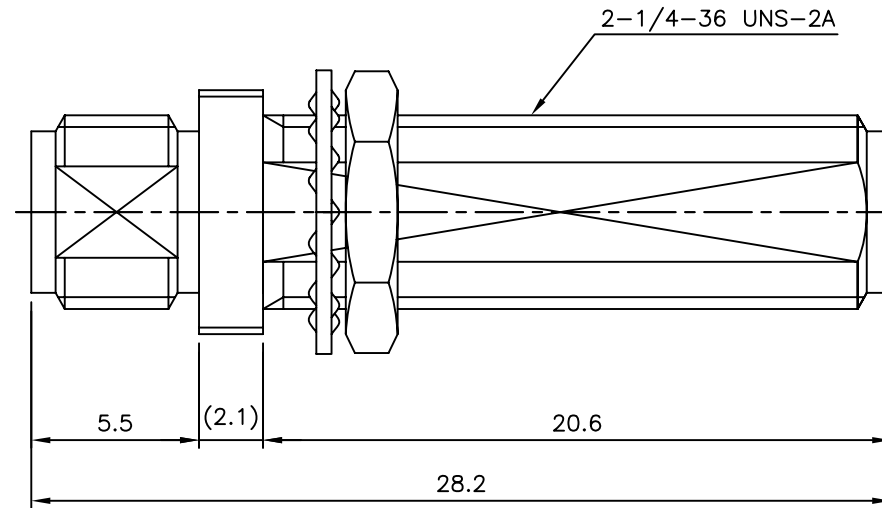


ELECTRICAL DATA

1. IMPEDANCE : 50ohm
2. FREQUENCY RANGE : DC~6GHz
3. VSWR (Max) : 1.2
4. INSERTION LOSS : 0.2dB (Max)

REVISION

REV	DESCRIPTION	DRAWN	APPR	DATE
IR	Initial Registration	I.C.KIM		2019.11.01.

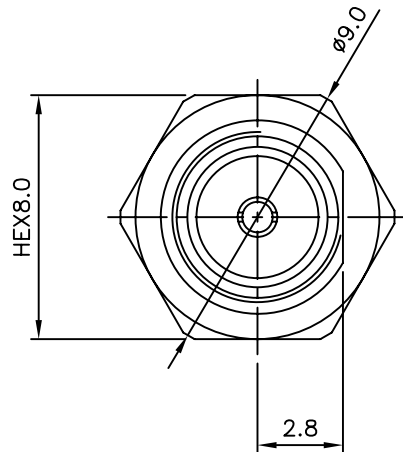

5	NUT	1	MBsBD C3604BD-F	Nickel Plate	DNT00025-5/5
4	WASHER	1	BsS	Nickel Plate	DWA00005-5/3
3	INSULATOR	2	TEFLON		DIN00105-N/2
2	CONTACT	1	BeCu C17300	Gold Plate	DAC03336-5/1
1	BODY	1	MBsBD C3604BD-F	Nickel Plate	DAD00388-5/1
NO.	DESCRIPTION	Q'TY	MATERIAL	PLATING	CODE

TOLERANCE	Decimal	DATE 2019. 11. 01.		 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017
	Angle	APPROVED BY		
MATERIAL		CHECKED BY		TITLE SMA50 (J) SMA50 (J) BH ADAPTOR
		DRAWN BY	I.C.KIM	
FINISH		SCALE	4/1	DWG NO. AD00511-7/4 REVISION I R SHEET 1 of 1
		UNIT	mm	

A4