


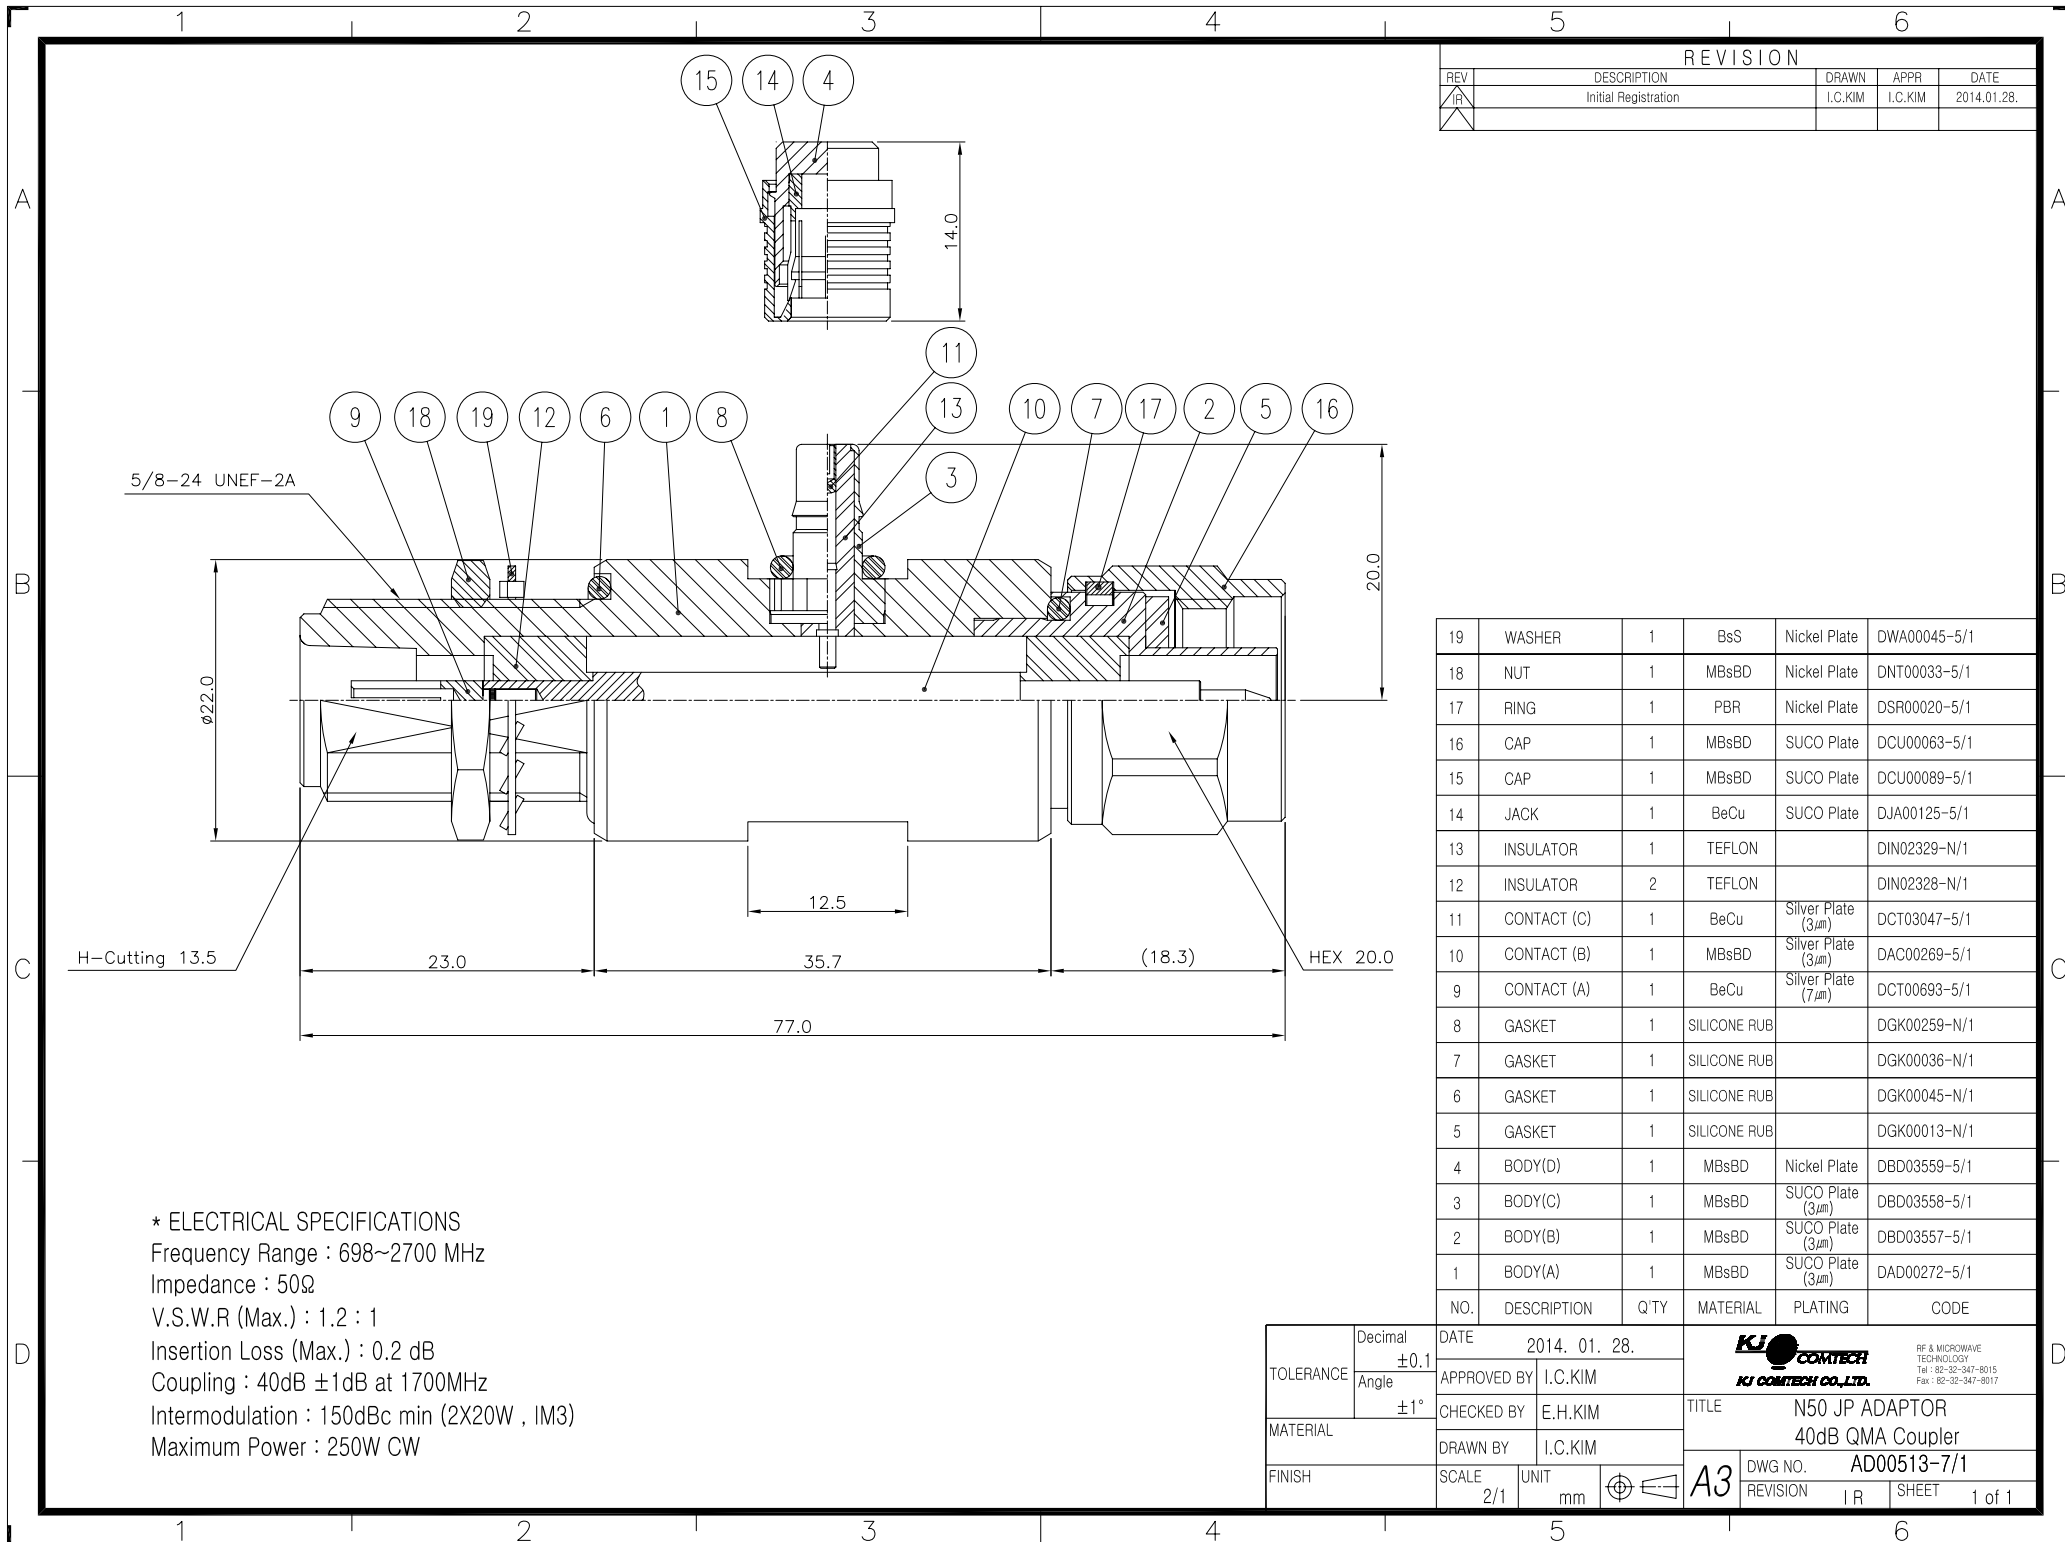

* ELECTRICAL SPECIFICATIONS
Frequency Range : 698~2700 MHz
Impedance : 50 Ω
V.S.W.R (Max.) : 1.2 : 1
Insertion Loss (Max.) : 0.2 dB
Coupling : 40dB $\pm$ 1dB at 1700MHz
Intermodulation : 150dBc min (2X20W , IM3)
Maximum Power : 250W CW