


AD00518-7/1

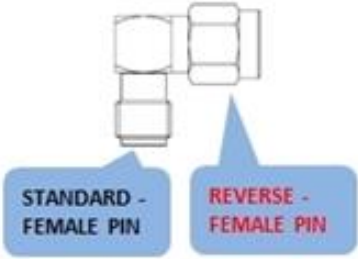

SMA (J) SMA (P) **REVERSE**
L:14.95-16.95mm
BO/GO, PI/GO, CAP/GO

AD00518-7/1

Frequency	
Insertion Loss	
VSWR	
Impedance	■ 50Ω □ 75Ω
Temperature	-40℃ ~ 125℃

S11/S22/S21(SWR, SWR, dB)

■_1GHz - 1.03, 1.03, 0.04
■_3GHz - 1.08, 1.09, 0.09
■_6GHz - 1.29, 1.32, 0.21
■_8GHz - 1.21, 1.20, 0.22
■10GHz - 1.33, 1.32, 0.31

■12GHz -
■14GHz -
■16GHz -
■18GHz -
■MaX_--

► **NETWORK ANALYZER**

- E5071B (~8.5GHz)
- ZVA50 (~50GHz)

► **Test cable**

- 2.4mm Male to 2.4mm Male 50GHz Cable

► **Test Adaptor**

- AD00644-7/2 2.92mm (J) to 2.92mm(J)
- AD00572-7/1 SMA50 (J) REVERSE SMA50 (P) ST

TR1: IN PORT VSWR(S11), TR2: OUT PORT VSWR(S22), TR3: Insertion Loss (S21)

