


AD00530-7/1

AD00530-7/1

S11/S22/S21(SWR, SWR, dB)

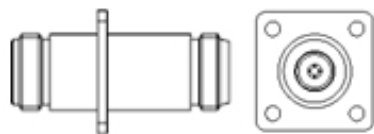

N (J) N (J) 4 HOLE
□25.4-18.2-3.2
L:45.4mm(18-2-25.4)
BO/NI, PI/GO

Frequency	
Insertion Loss	
VSWR	
Impedance	■ 50Ω □ 75Ω
Temperature	-40℃ ~ 125℃

■ _1.0GHz - 1.03, 1.04, 0.01
■ _2.0GHz - 1.04, 1.04, 0.00
■ _3.0GHz - 1.02, 1.01, 0.01
■ _4.0GHz - 1.10, 1.09, 0.02
■ _5.0GHz - 1.07, 1.05, 0.02
■ _6.0GHz - 1.01, 1.03, 0.03
■ _7.0GHz - 1.12, 1.12, 0.03
■ _8.0GHz - 1.13, 1.11, 0.05

► NETWORK ANALYZER

► Test cable


► Test Adaptor

■ E5071B (~8.5GHz)

■ N Male to N Male

□ ZVA50 (~50GHz)

10GHz Cable (CF00539-7/1)

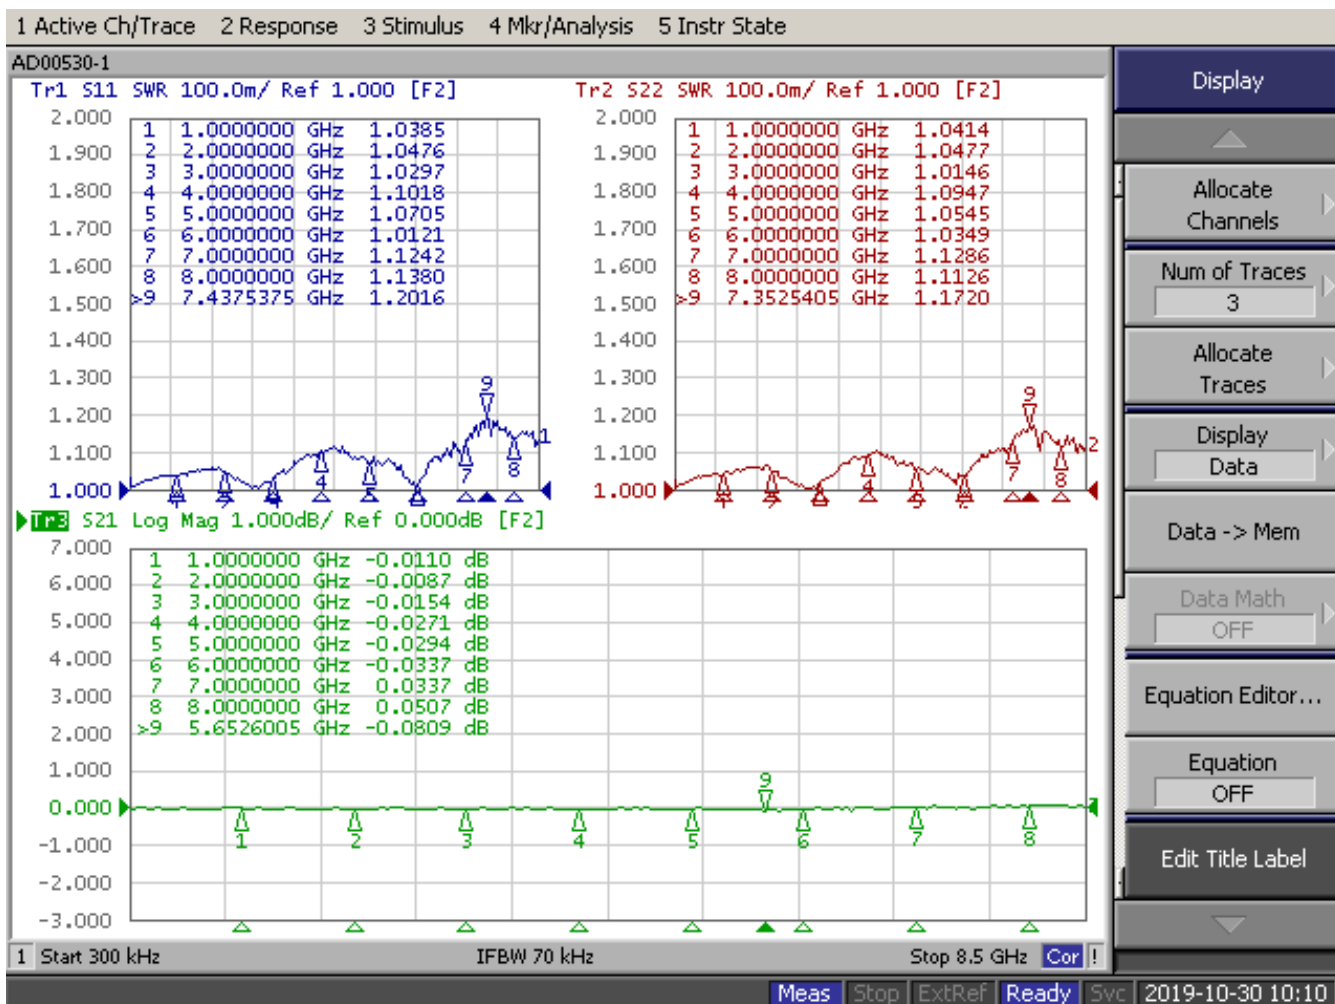

TR1: IN PORT VSWR(S11), TR2: OUT PORT VSWR(S22), TR3: Insertion Loss (S21)