


AD00535-7/1

AD00535-7/1

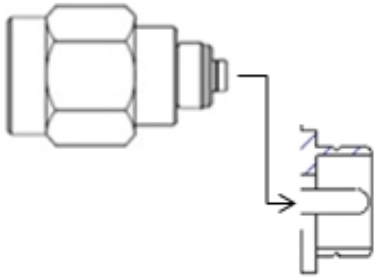

SMA (P) UFL (P)
ST L:15.5mm (UFL 내부메이팅)
BO/GO, PI/GO, CAP/NI

Frequency	
Insertion Loss	
VSWR	
Impedance	■ 50Ω □ 75Ω
Temperature	-40℃ ~ 125℃

S11/S22/S21(SWR, SWR, dB)

■_1.0GHz	- 1.01, 1.02, 0.18
■_2.0GHz	- 1.07, 1.08, 0.22
■_3.0GHz	- 1.16, 1.17, 0.19
■_4.0GHz	- 1.26, 1.28, 0.14
■_5.0GHz	- 1.42, 1.44, 0.03
■_6.0GHz	- 1.56, 1.63, 0.12
■_7.0GHz	- 1.68, 1.73, 0.22
■_8.0GHz	- 1.75, 1.78, 0.27

▶ NETWORK ANALYZER ▶ Test cable

▶ Test Adaptor

■ E5071B (~8.5GHz)

□ ZVA50 (~50GHz)

TR1: IN PORT VSWR(S11), TR2: OUT PORT VSWR(S22), TR3: Insertion Loss (S21)

