



REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
1 R	Initial Registration	E.H.KIM	I.C.KIM	2014.09.29.

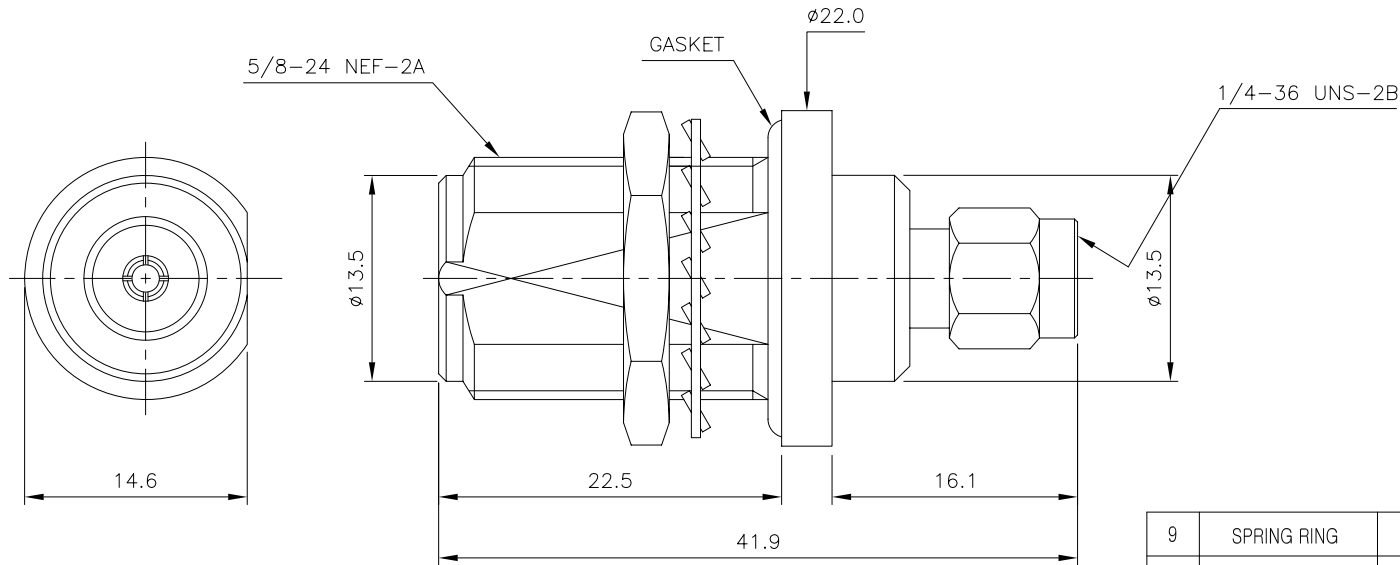

9	SPRING RING	1	Stainless steel	Passivated	DSR00002-5/1 (R2001)
8	WASHER	1	BsS	Nickel Plated	DWA00045-5/1 (Q8018)
7	NUT	1	BRASS	Nickel Plated	DNT00033-5/1 (N8001)
6	CAP	1	BRASS	Nickel Plated	DCU00005-5/2
5	INSULATOR	1	PTFE		DAI00091-N/1
4	GASKET	1	SILICONE RUB	Red	DGK00047-N/1
3	GASKET	1	SILICONE RUB	Red	DGK00004-N/1 (G2001)
2	CONTACT	1	Beryllium copper	Gold Plated	DAC00164-5/1
1	BODY	1	BRASS	Nickel Plated	DAD00284-5/1
NO.	DESCRIPTION	Q'TY	MATERIAL	PLATING	CODE

- * ELECTRICAL SPEC.
1. Impedance : 50 ohm (Nominal)
 2. Frequency Range : DC ~ 6 GHz

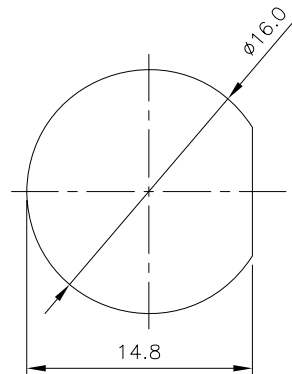

Recommended Panel Configuration

TOLERANCE	Decimal	DATE 2014. 09. 29.		 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017
	Angle	APPROVED BY	I.C.KIM	
MATERIAL		CHECKED BY		KJ COMTECH CO.,LTD. TITLE N50(J) B/H- SMA(P) ADAPTOR
		DRAWN BY	E.H.KIM	
FINISH		SCALE 2/1	UNIT mm	A4 DWG NO. AD00536-7/1 REVISION I R SHEET 1 of 1