


AD00537-7/4



MCX (J) MCX (J) 2 HOLE
2H/5.6-11.32-2.6
L:14.7mm(5-1.7-8)
BO/NI, PI/GO

AD00537-7/4

Frequency	
Insertion Loss	
VSWR	
Impedance	■ 50Ω □ 75Ω
Temperature	-40℃ ~ 125℃

S11/S22/S21(SWR, SWR, dB)

■_1.0GHz	- 1.08, 1.08, 0.04
■_2.0GHz	- 1.09, 1.09, 0.10
■_3.0GHz	- 1.05, 1.06, 0.12
■_4.0GHz	- 1.02, 1.03, 0.11
■_5.0GHz	- 1.02, 1.03, 0.12
■_6.0GHz	- 1.10, 1.08, 0.14
■_7.0GHz	- 1.12, 1.12, 0.17
■_8.0GHz	- 1.05, 1.03, 0.12

► NETWORK ANALYZER ► Test cable


► Test Adaptor

■ E5071B (~8.5GHz)


□ ZVA50 (~50GHz)

1 Active Ch/Trace 2 Response 3 Stimulus 4 Mkr/Analysis 5 Instr State

Tr1 S11 SWR 100.0m/ Ref 1.000 [F2]

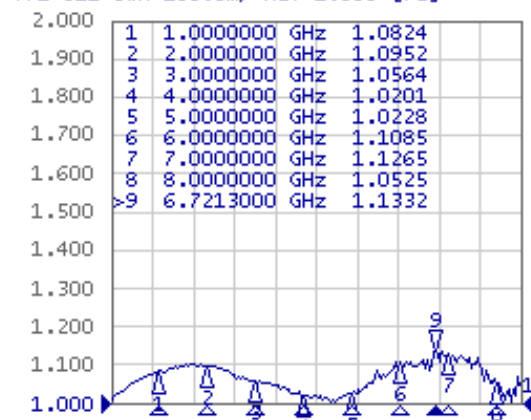

Tr2 S22 SWR 100.0m/ Ref 1.000 [F2]

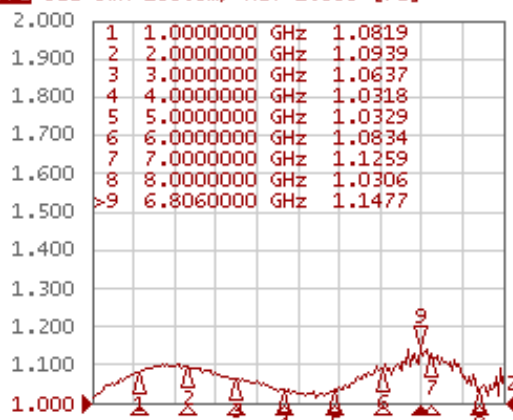

Tr3 S21 Log Mag 1.000dB/ Ref 0.000dB [F2]



1 Start 30 MHz

IFBW 70 kHz

Stop 8.5 GHz

Meas Stop ExtRef Ready Svc 2020-04-17 17:54

System

Print

Abort Printing

Printer Setup...

Invert Image

ON

Dump Screen Image...

Multipoint Test Set Setup

Misc Setup

Backlight

ON

Firmware Revision

TR1: IN PORT VSWR(S11), TR2: OUT PORT VSWR(S22), TR3: Insertion Loss (S21)