


AD00543-7/2

이원합금

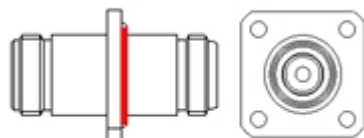

N(J) N(J) 4 HOLE

□25.4-18.2-3.2

L:40.8mm(19-3-18.8)

BO/NI/TIN, PI/GO

AD00543-7/2

Frequency	
Insertion Loss	
VSWR	
Impedance	■ 50Ω □ 75Ω
Temperature	-40℃ ~ 125℃

S11/S22/S21(SWR, SWR, dB)

■_1.0GHz	-	1.02	1.03	0.01
■_2.0GHz	-	1.05	1.04	0.00
■_3.0GHz	-	1.00	1.01	0.00
■_4.0GHz	-	1.06	1.06	0.01
■_5.0GHz	-	1.08	1.08	0.01
■_6.0GHz	-	1.06	1.07	0.00
■_7.0GHz	-	1.03	1.02	0.02
■_8.0GHz	-	1.02	1.02	0.08

▶ NETWORK ANALYZER

▶ Test cable

▶ Test Adaptor

■ E5071B (~8.5GHz)

■ N Male to N Male

□ ZVA50 (~50GHz)

10GHz Cable (CF00539-7/1)

TR1 : IN PORT VSWR(S11), TR2 : OUT PORT VSWR(S22), TR3: Insertion Loss (S21)

