


REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
IR	Initial Registration		I.C.KIM	2015.01.22.
↑	[설번No.201904-0001] PIN 이탈 개선으로 인한 핀 변경	S.Y.EUN	I.C.KIM	2019.04.04.

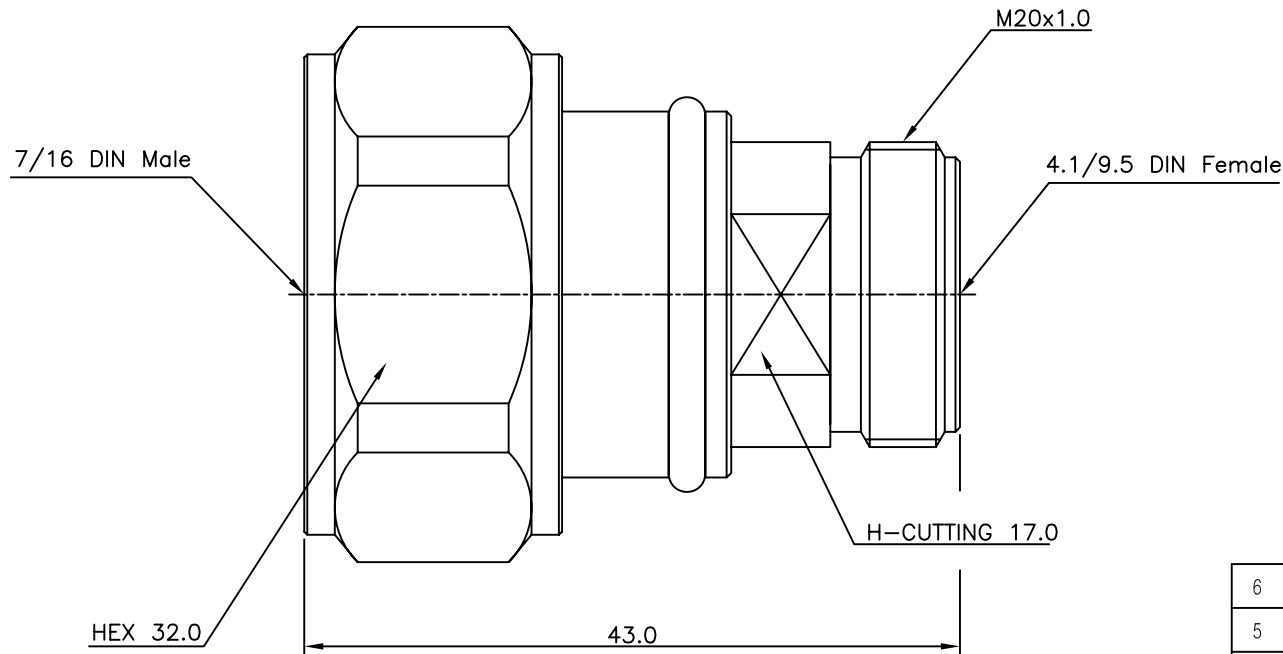

ENVIRONMENTAL DATA:

1. TEMPERATURE RANGE : -40°C ~ +125°C

ELECTRICAL DATA :

1. IMPEDANCE : 50ohm
2. FREQUENCY RANGE : DC~3GHz
3. VSWR (Max) : 1.2
4. INSERTION LOSS (Max) : 0.2dB
5. PIMD (-43dBm / 2tone) 3rd Order IMD : -160dBc (Min.)

6	COUPLING CAP	1	MBsBD	SUCO Plate	DCU00078-5/1
5	INSULATOR	1	TEFLON		DIN02536-N/1
4	GASKET	2	SILICONE RUB		DGK00054-N/1
3	CONTACT	1	MBsBD	Silver Plate (5μm)	DCT03385-5/2 DCT03385-5/1
2	CONTACT	1	BeCu	Silver Plate (5μm)	DCT03330-5/1
1	BODY	1	MBsBD	SUCO Plate (5μm)	DAD00287-5/1
NO.	DESCRIPTION	Q'TY	MATERIAL	PLATING	CODE

TOLERANCE	Decimal	DATE 2019. 04. 04.		 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017
	Angle	APPROVED BY	I.C.KIM	
MATERIAL	-	CHECKED BY		KJ COMTECH CO.,LTD. TITLE 7/16 DINP-4.1/9.5 DINJ ADAPTOR
		DRAWN BY	S.Y.EUN	
FINISH	-	SCALE	2/1	DWG NO. AD00553-7/1 REVISION 1 SHEET 1 of 1
		UNIT	mm	

