


REVISION						
REV	DESCRIPTION			DRAWN	APPR	DATE
1R	Initial Registration			S.M.LEE	I.C.KIM	2015.04.08.


1/4-36 UNS-2A

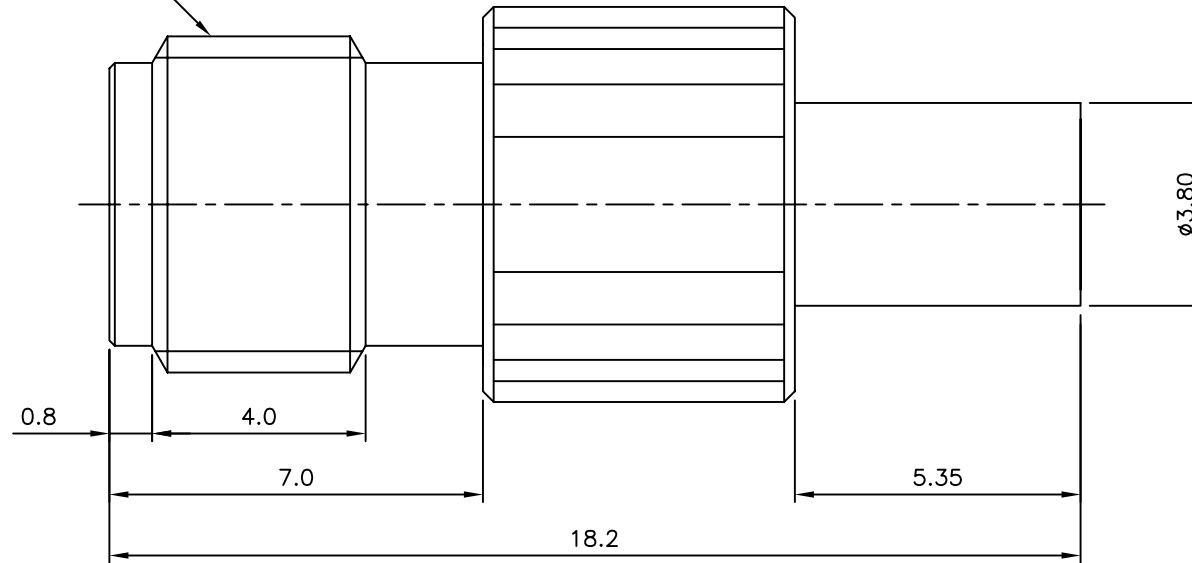

* 삽입력 확인 (KMS-156) - 상대물 체결
 -삽입력 : 1.0~1.3Kgf
 -이탈력 : 0.6~0.9Kgf

7	SPRING	1	SUS304	Passivate	DSR01083-5/1
6	JACK	1	BeCu C17300	Nickel Plate	DJA00193-N/1
5	CAP	1	MBsBD C3604BD-F	Nickel Plate	DCU02262-5/1
4	INSULATOR	1	TEFLON		DAI02461-N/1
3	CONTACT	1	MBsBD C3604BD-F	Gold Plate	DCT02974-5/1
2	CONTACT	1	MBsBD C3604BD-F	Gold Plate	DCT03450-5/1
1	BODY	1	MBsBD C3604BD-F	Nickel Plate	DAD00291-5/1
NO.	DESCRIPTION	Q'TY	MATERIAL	PLATING	CODE

TOLERANCE	Decimal ±0.1	DATE 2015. 04. 08.		 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017
	Angle ±1°	APPROVED BY	I.C.KIM	
MATERIAL		CHECKED BY		KJ COMTECH CO.,LTD. TITLE KMS-156 (P) SMA50 (J) ST Adaptor
		DRAWN BY	S.M.LEE	
FINISH		SCALE	7/1	DWG NO. AD00555-7/1 REVISION I R SHEET 1 of 1
		UNIT	mm	



A4