

AD00557-7/1

PIMD



4.1/9.5 DIN (J) SMA (J)

4 HOLE □25-18.4-3.2

L:62mm(48-2-12)

BODY/SUCO/5, PIN/Silver/5

AD00557-7/1

Frequency	
Insertion Loss	
VSWR	
Impedance	■ 50Ω □ 75Ω
Temperature	-40°C ~ 125°C

S11/S22/S21(SWR, SWR, dB)

■_1.0GHz	- 1.01, 1.01, 0.38
■_2.0GHz	- 1.04, 1.04, 0.34
■_3.0GHz	- 1.16, 1.14, 0.31
■_4.0GHz	- 1.24, 1.23, 0.29
■_5.0GHz	- 1.23, 1.22, 0.23
■_6.0GHz	- 1.25, 1.24, 0.19
■_7.0GHz	- 1.19, 1.21, 0.19
■_8.0GHz	- 1.36, 1.37, 0.29

► NETWORK ANALYZER

► Test cable


► Test Adaptor

■ E5071B (~8.5GHz)

□ ZVA50 (~50GHz)

TR1: IN PORT VSWR(S11), TR2: OUT PORT VSWR(S22), TR3: Insertion Loss (S21)

1 Active Ch/Trace 2 Response 3 Stimulus 4 Mkr/Analysis 5 Instr State

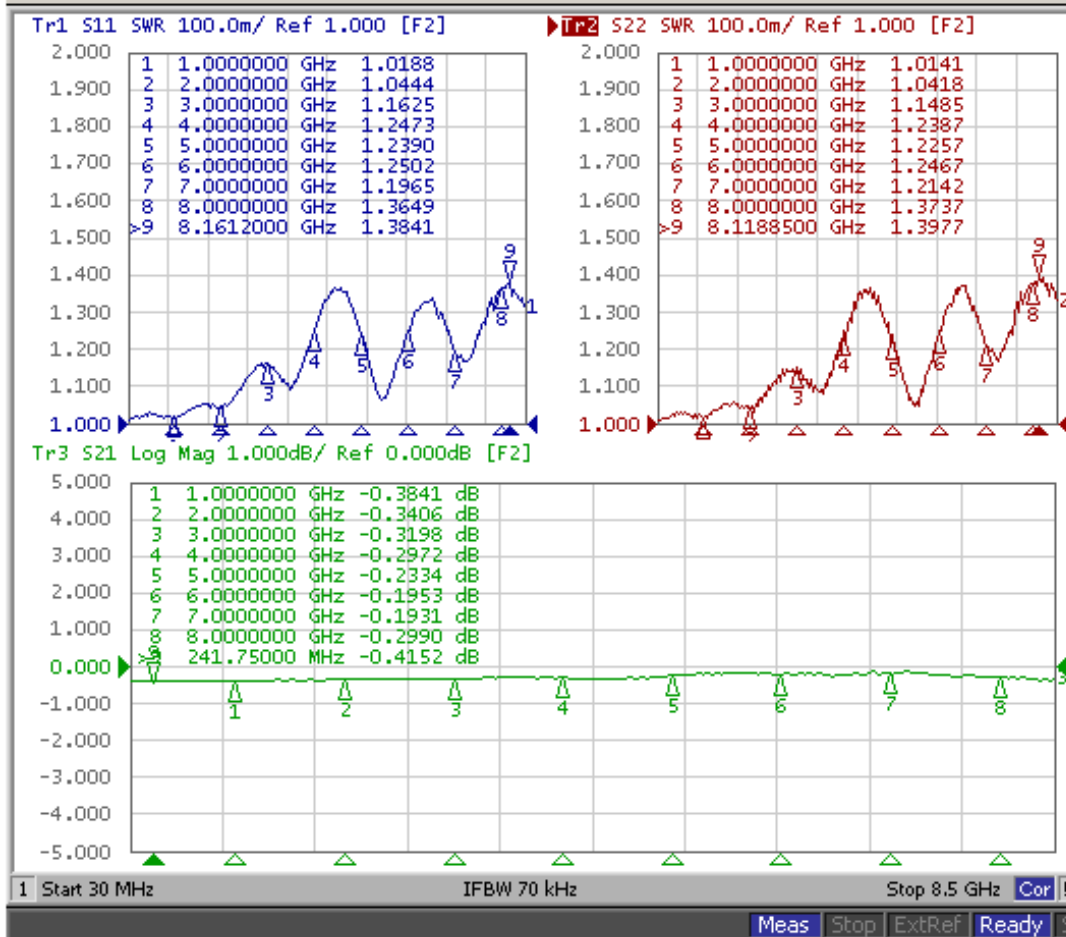

System

Print

Abort Printing

Printer Setup...

Invert Image

ON

Dump Screen Image...

Multipoint Test Set Setup

Misc Setup

Backlight

ON

Firmware

Revision