


AD00567-7/1

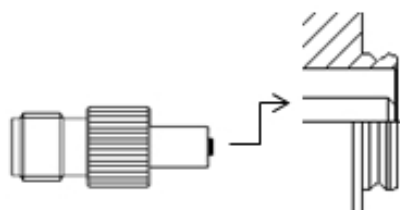

SMA (J)
X.FL(1.2t) (J) **SPRING-X**
ST L:15.6mm
BO/NI, PI/GO

AD00567-7/1

Frequency	
Insertion Loss	
VSWR	
Impedance	■ 50Ω □ 75Ω
Temperature	-40°C ~ 125°C

S11/S22/S21(SWR, SWR, dB)

■ _1.0GHz	- 1.04, 1.04, 0.20
■ _2.0GHz	- 1.06, 1.06, 0.26
■ _3.0GHz	- 1.02, 1.05, 0.27
■ _4.0GHz	- 1.09, 1.13, 0.26
■ _5.0GHz	- 1.19, 1.20, 0.20

■ _6.0GHz	- 1.26, 1.31, 0.10
■ _7.0GHz	- 1.28, 1.31, 0.06
■ _8.0GHz	- 1.27, 1.31, 0.10

► NETWORK ANALYZER ► Test cable

► Test Adaptor

■ E5071B (~8.5GHz)

□ ZVA50 (~50GHz)

TR1: IN PORT VSWR(S11), TR2: OUT PORT VSWR(S22), TR3: Insertion Loss (S21)

