


AD00568-7/1

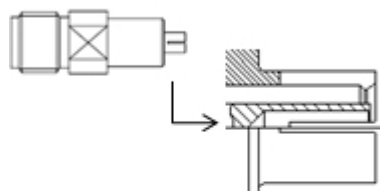

SMA (J)
X.FL(1.2t) (P) **SPRING-X**
ST L:18.1mm
BO/NI, PI/GO

AD00568-7/1

Frequency	
Insertion Loss	
VSWR	
Impedance	■ 50Ω □ 75Ω
Temperature	-40°C ~ 125°C

S11/S22/S21(SWR, SWR, dB)

■ _1.0GHz - 1.04, 1.04, 0.23
■ _2.0GHz - 1.06, 1.06, 0.27
■ _3.0GHz - 1.02, 1.05, 0.30
■ _4.0GHz - 1.10, 1.13, 0.29
■ _5.0GHz - 1.19, 1.20, 0.22

■ _6.0GHz - 1.27, 1.31, 0.12
■ _7.0GHz - 1.29, 1.31, 0.07
■ _8.0GHz - 1.27, 1.31, 0.10

► NETWORK ANALYZER ► Test cable

► Test Adaptor

■ E5071B (~8.5GHz)

□ ZVA50 (~50GHz)

TR1: IN PORT VSWR(S11), TR2: OUT PORT VSWR(S22), TR3: Insertion Loss (S21)

