

AD00574-7/1


AD00574-7/1

Frequency	
Insertion Loss	
VSWR	
Impedance	■ 50Ω □ 75Ω
Temperature	-40℃ ~ 125℃

S11/S22/S21(SWR, SWR, dB)

■_1GHz	- 1.03, 1.03, 0.02
■_3GHz	- 1.03, 1.04, 0.06
■_6GHz	- 1.10, 1.09, 0.08
■_8GHz	- 1.04, 1.05, 0.09

■10GHz	- 1.23, 1.24, 0.16
■12GHz	- 1.38, 1.40, 0.23
■14GHz	- 1.25, 1.28, 0.22
■16GHz	- 1.24, 1.19, 0.27
■18GHz	- 1.46, 1.37, 0.49
■MaX_--	- 1.46, 1.40, 0.49

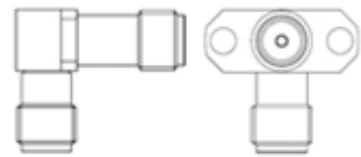

SMA (J) SMA (J) RA
2HOLE L:15.05-18mm
2H/6.5-12.2-2.7
BO/NI, PI/GO

► NETWORK ANALYZER ► Test cable ► Test Adaptor

- E5071B (~8.5GHz) ■ 2.4mm Male to 2.4mm Male
■ ZVA50 (~50GHz) 50GHz Cable

TR1: IN PORT VSWR(S11), TR2: OUT PORT VSWR(S22), TR3: Insertion Loss (S21)

