


AD00577-7/1

AD00577-7/1

PCB: 3.2t

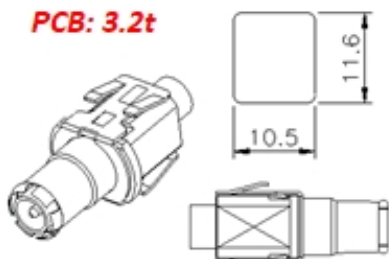

SMBL (J) TRU (P)

PANEL LOCK L:35.1mm

BO/NI, PI/GO

Frequency	
Insertion Loss	
VSWR	
Impedance	■ 50Ω □ 75Ω
Temperature	-40°C ~ 125°C

S11/S22/S21(SWR, SWR, dB)

■_1.0GHz - 1.09, 1.10, 0.09
■_2.0GHz - 1.01, 1.04, 0.06
■_3.0GHz - 1.11, 1.03, 0.01
■_4.0GHz - 1.19, 1.21, 0.00

■_5.0GHz - 1.26, 1.29, 0.01
■_6.0GHz - 1.15, 1.21, 0.10
■_7.0GHz - 1.60, 1.76, 0.48
■_8.0GHz - 1.64, 1.68, 0.39

► NETWORK ANALYZER

► Test cable

► Test Adaptor

■ E5071B (~8.5GHz)

□ ZVA50 (~50GHz)

TR1: IN PORT VSWR(S11), TR2: OUT PORT VSWR(S22), TR3: Insertion Loss (S21)

