
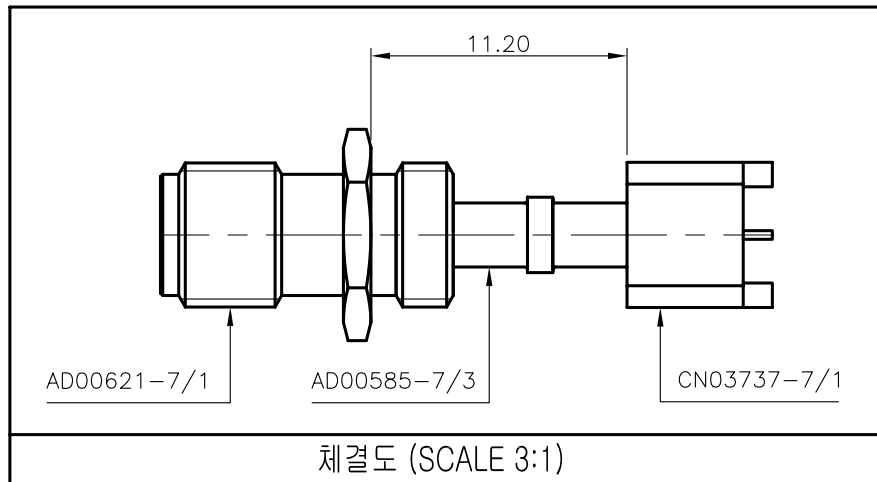


* ELECTRICAL SPECIFICATIONS

1. Frequency Range : DC~3GHz
2. Impedance : 50Ω
3. V.S.W.R (MAX) : 1.2
4. Insertion Loss (MIN) : -0.2dB

REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
IR	Initial Registration	S.Y.EUN	I.C.KIM	2020.11.05.

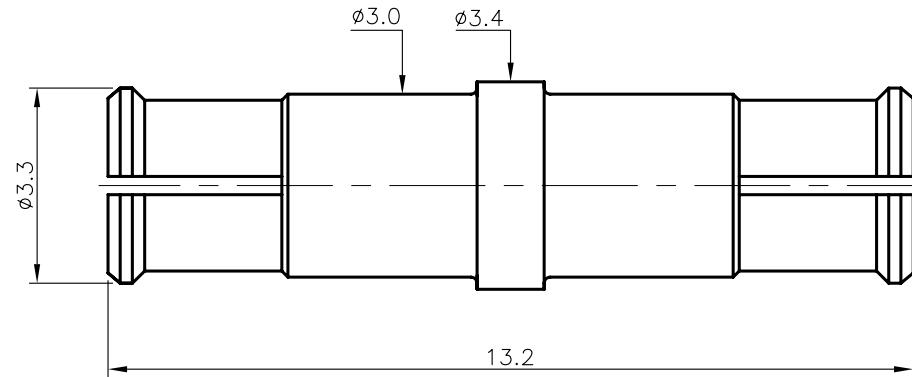

3	INSULATOR	1	TEFLON		DAI02471-N/6
2	CONTACT	1	BeCu C17300	Gold Plate	DAC03259-5/3
1	BODY	1	BeCu C17300	Gold Plate	DAD00317-5/5
NO.	DESCRIPTION	Q'TY	MATERIAL	PLATING	CODE

TOLERANCE	Decimal	DATE 2020. 11. 05.	
	Angle	APPROVED BY I.C.KIM	
MATERIAL		CHECKED BY	
		DRAWN BY S.Y.EUN	
FINISH		SCALE 8/1	UNIT mm

 KJ COMTECH CO.,LTD.		RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017	
TITLE SMP50 (J) SMP50 (J) ST			
A4	DWG NO. AD00585-7/5		
	REVISION	IR	SHEET 1 of 1

A4