


AD00585-7/8




SMP (J) SMP (J)
ST L: 5.7mm
BODY/BE.CU/Gold PIN/Gold

AD00585-7/8	
Frequency	
Insertion Loss	
VSWR	
Impedance	☒ 50Ω ☐ 75Ω
Temperature	-40℃ ~ 125℃

► NETWORK ANALYZER ► Test cable ► Test Adaptor

- ☐ E5071B (~8.5GHz)
☐ ZND (~8.5GHz)
☒ ZVA50 (~50GHz)
- ☐ N Male to SMA Male
10GHz Cable (CF00540-7/1)
☐ N Male to N Male
10GHz Cable (CF00539-7/1)
☒ 2.4mm Male to 2.4mm Male
50GHz Cable)

TR1 : IN PORT VSWR(S11), TR2 : OUT PORT VSWR(S22), TR3: Insertion Loss (S21)

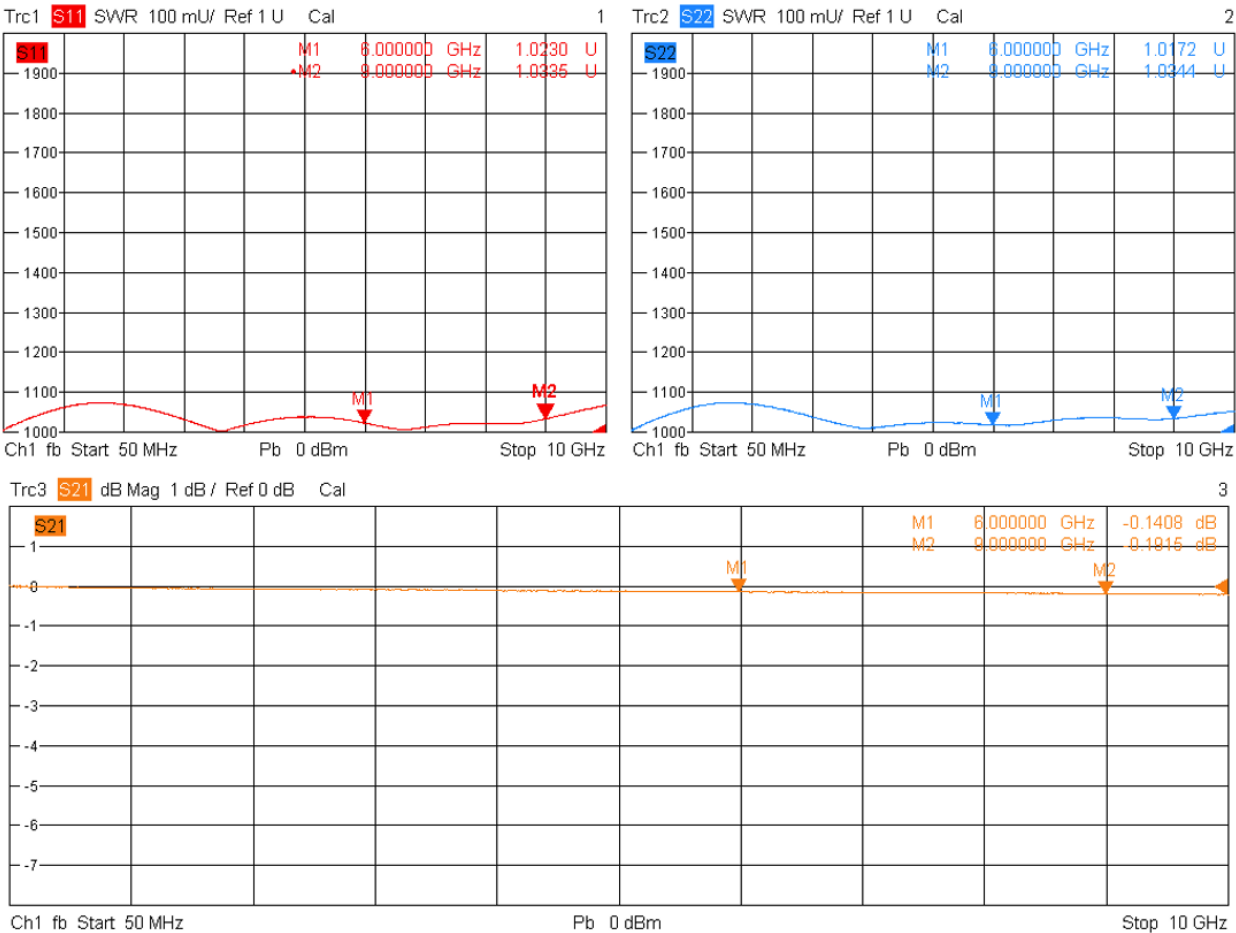

4/14/2022, 5:56 AM