

AD00585-7/A

AD00585-7/A

Frequency	
Insertion Loss	
VSWR	
Impedance	☒ 50Ω ☐ 75Ω
Temperature	-40°C ~ 125°C

■ VSWR 9~10GHz
~1.2:1

INSERTION LOSS

0.46dB

핀 GOLD 0.1 미크론

SMP (J) SMP (J)

ST L:49.6mm

BODY/BE.CU/Gold PIN/Gold

▶ NETWORK ANALYZER

▶ Test cable

▶ Test Adaptor

■ E5071B (~8.5GHz)

■ N Male to SMA Male


☐ ZND (~8.5GHz)

10GHz Cable (CF00540-7/1)

☐ ZVA50 (~50GHz)

☐ N Male to N Male

TR1: IN PORT VSWR(S11), TR2: OUT PORT VSWR(S22), TR3: Insertion Loss (S21)

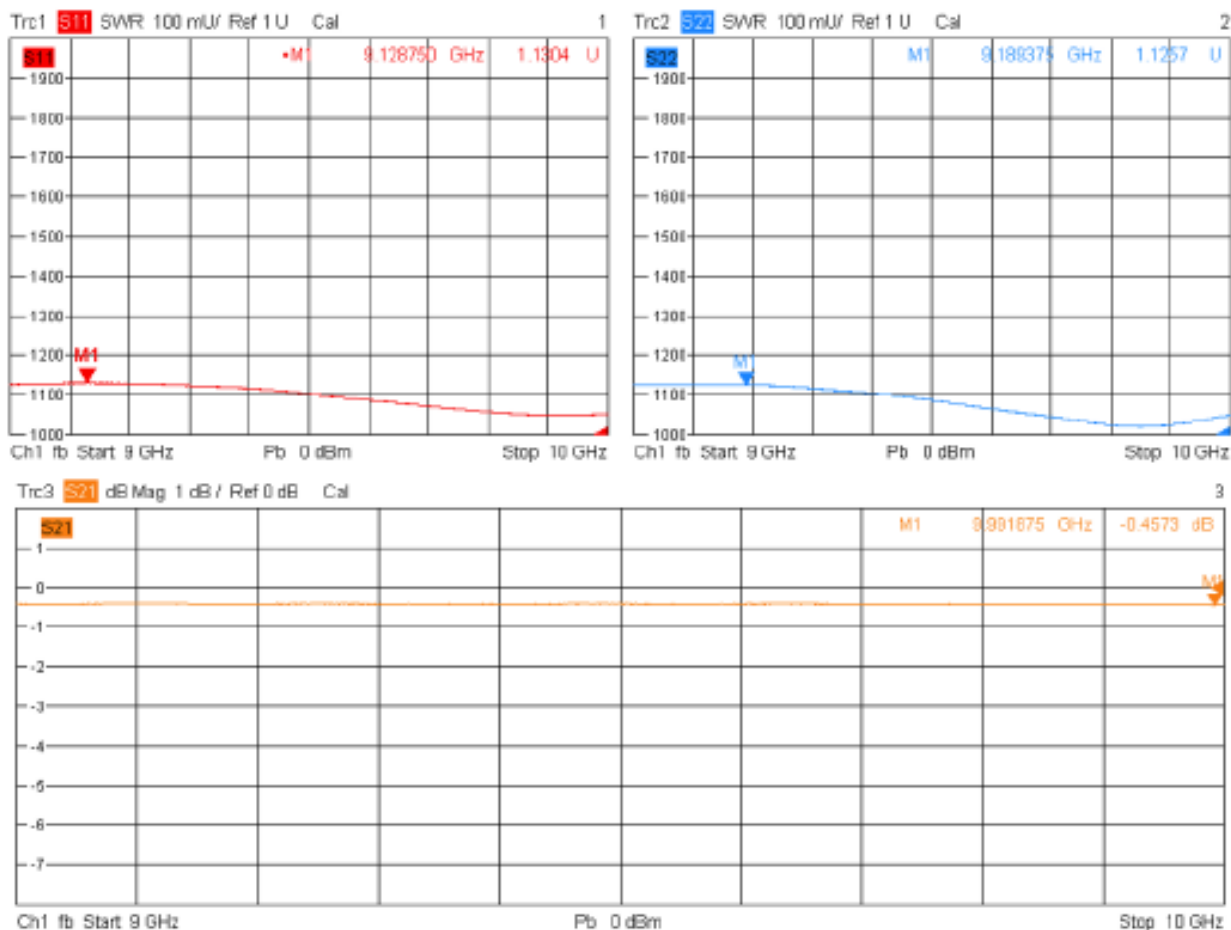

4/20/2022, 2:03 AM

AD00585-7/A



AD00585-7/A	
Frequency	9~10GHz
Insertion Loss	0.25dB
VSWR	~1.2:1
Impedance	50Ω 75Ω
Temperature	-40℃ ~ 125℃

SMP (J) SMP (J)

ST L:49.6mm

BODY/BE.CU/Gold PIN/Gold

■ VSWR 9~10GHz

~1.2:1

INSERTION LOSS

0.25dB

핀 SILVER

1.0미크론 이상

- ▶ NETWORK ANALYZER ▶ Test cable ▶ Test Adaptor
- ☒ E5071B (~8.5GHz)


☐ ZND (~8.5GHz)

☐ ZVA50 (~50GHz)
- ☒ N Male to SMA Male

10GHz Cable (CF00540-7/1)

☐ N Male to N Male

TR1 : IN PORT VSWR(S11), TR2 : OUT PORT VSWR(S22), TR3: Insertion Loss (S21)

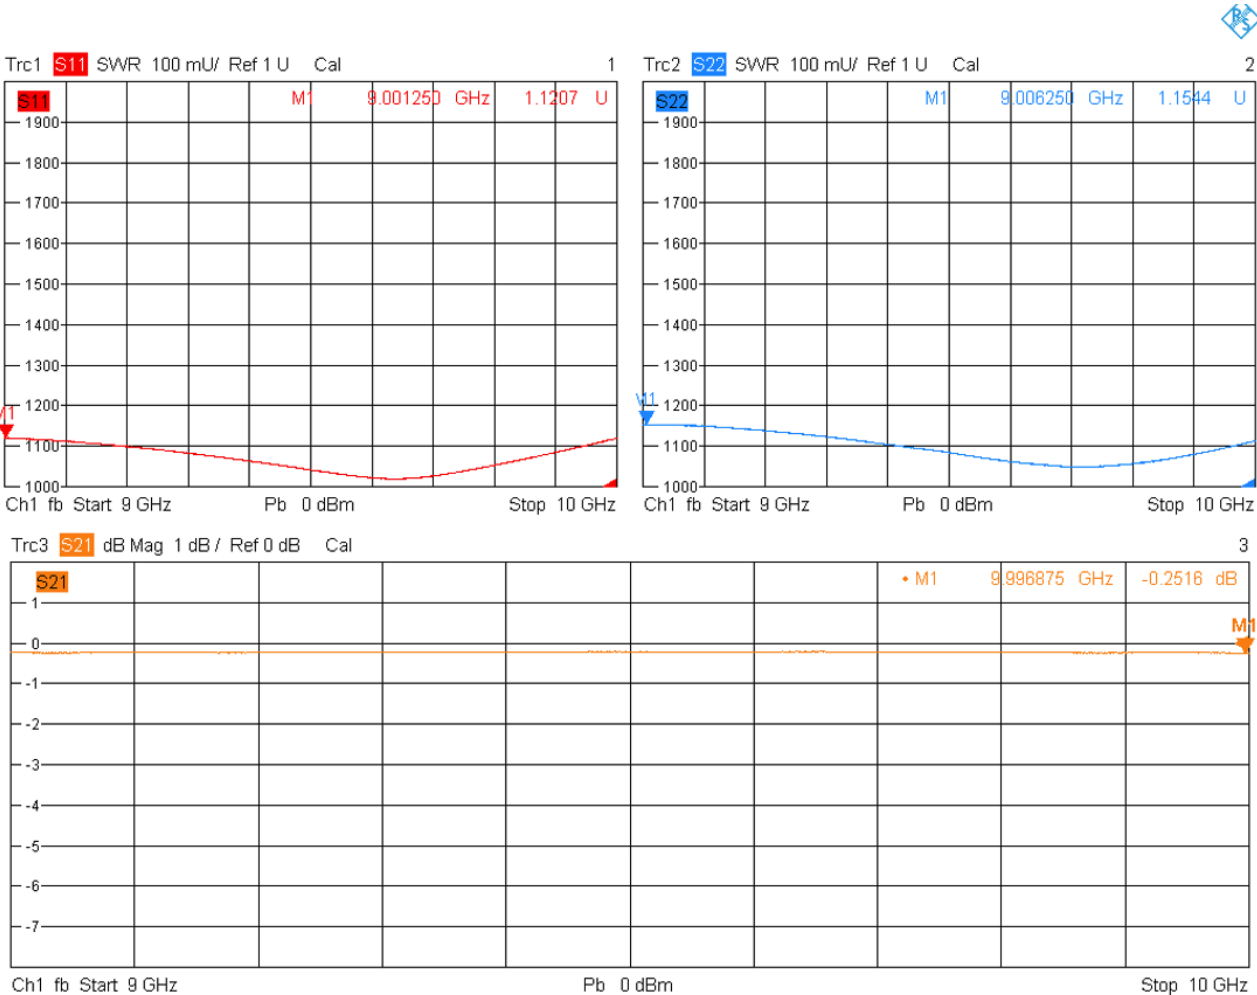

4/26/2022, 6:55 AM