



REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
IR	Initial Registration	S.H.KIM		2023.07.20.

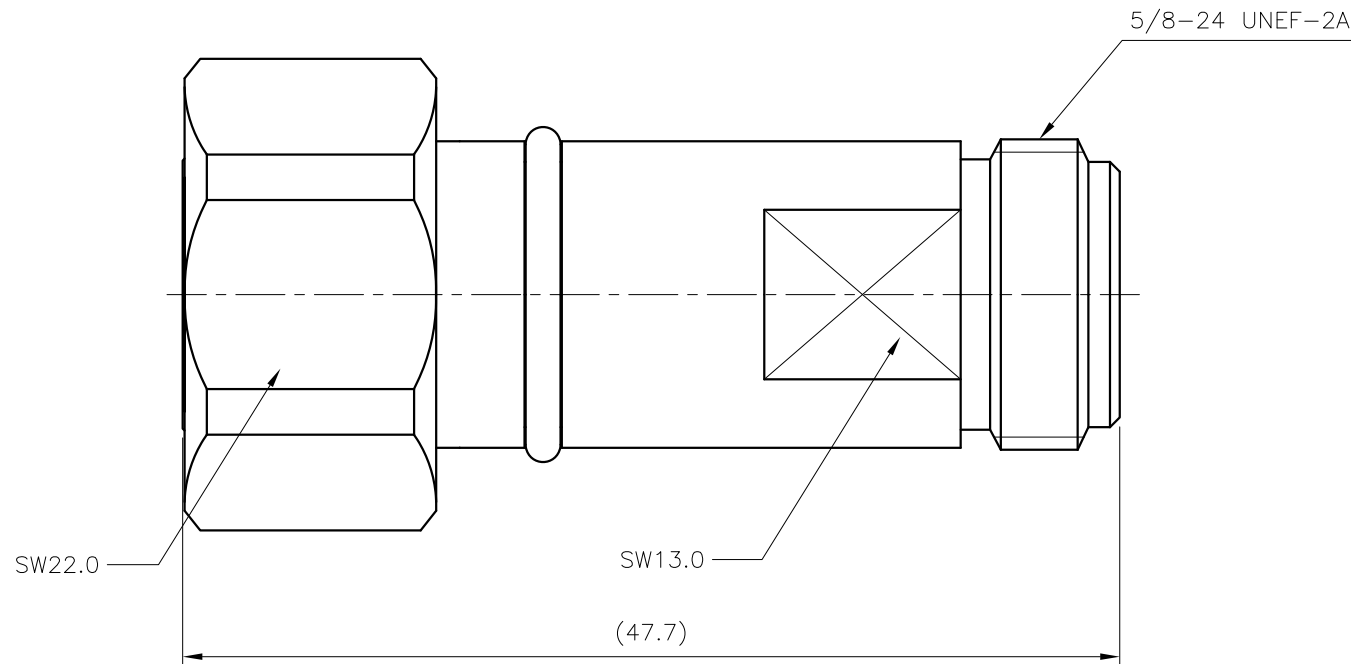

* 조립 후 END CAP 체결할 것
- N50 Female : DGK00114-N/1

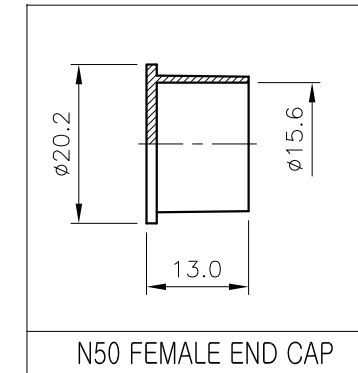

* 전기적 특성

1	Frequency range	DC ~ 6GHz
2	Impedance	50ohm NOMINAL
3	V.S.W.R (Max.)	1.2 @ 6GHz
4	Insertion loss (Min.)	-0.2dB
5	PIMD (-43dBm / 2 tone)	CDMA/WCDMA 3차: -160dBc (Max)

7	END CAP	1	ABS(White)		DGK00114-N/1
6	CAP	1	MBsBD C3604BD-F	Nickel Plate	DCU02282-5/1
5	GASKET	1	SILICONE RUB		DGK00036-N/1
4	GASKET	1	SILICONE RUB		DGK00121-N/1
3	INSULATOR	1	TEFLON		DIN03366-N/1
2	CONTACT	1	BeCu C17300	Silver Plate (3μm)	DAC03260-5/4
1	BODY	1	MBsBD C3604BD-F	SUCO Plate (3μm)	DAD00320-5/4
NO.	DESCRIPTION	Q'TY	MATERIAL	PLATING	CODE

TOLERANCE	Decimal ±0.2	DATE 2023. 07. 20.			 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017
	Angle ±1°	APPROVED BY			
MATERIAL _____	CHECKED BY				TITLE 4.3/10 DIN50 (P) N50(J) ADAPTOR
	DRAWN BY	S.H.KIM			
FINISH _____	SCALE 2.5/1	UNIT mm		A4	DWG NO. AD00588-7/4
					REVISION I R