
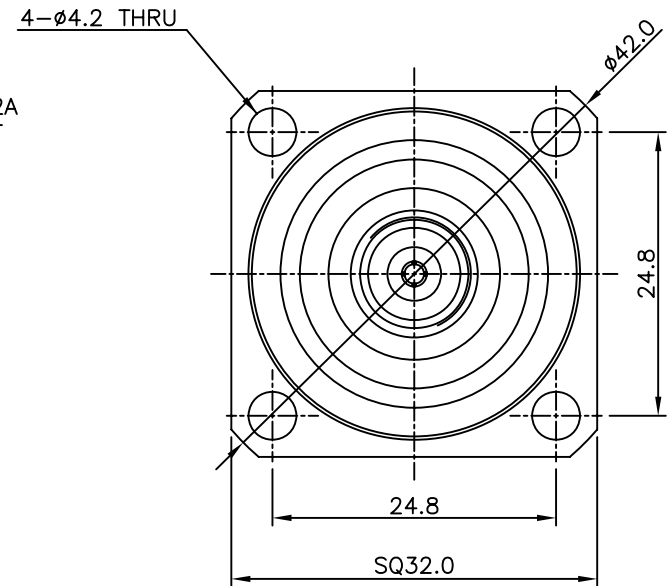


REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
IR	Initial Registration	C.K.KIM	I.C.KIM	2016. 10. 19.
1	[설번처리No.201703-0006] 핀 텐션 조절 치수 변경	I.C.KIM		2017. 03. 10.
2	[설번처리No.201703-0011] 고객사 요청 바디 도금 변경	I.C.KIM		2017. 03. 31.

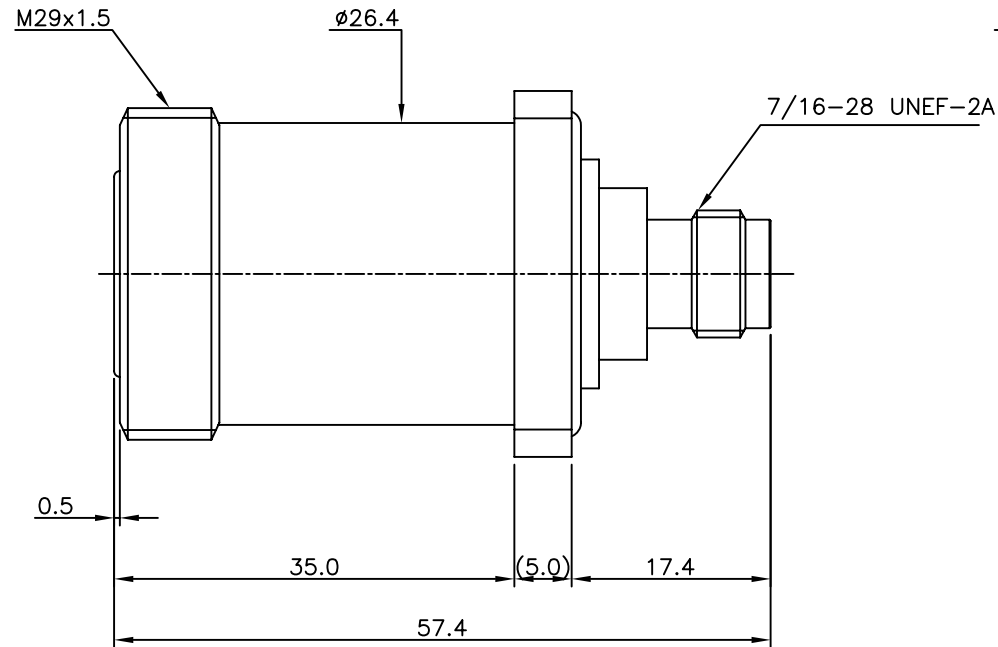

※내전압 검사 할 것

* 전기적 특성

1	Frequency range	DC ~ 3000MHz
2	Impedance	50ohm NOMINAL
3	V.S.W.R	1.2 : 1 (Max)
4	Insertion loss	-0.2dB (Min)
5	PIMD (-43dBm / 2 tone)	3차: 155dBc (Min)

7	END CAP	1	PLASTIC	WHITE	DGK00113-N/1
6	GASKET	1	SILICONE RUB	RED	DGK00055-N/1
5	INSULATOR	1	TEFLON		DIN02807-N/1
4	INSULATOR	1	TEFLON		DIN01482-N/1
3	CONTACT	1	BeCu C17300	Silver Plate	DCT03735-5/1
2	CONTACT	1	MBsBD C3601BD-F	Silver Plate	DCT03734-5/2 DCT03734-5/1
1	BODY	1	MBsBD C3604BD-F	이원합금(Ni/Tin) SUGO Plate	DAD00321-5/3 DAD00321-5/2
NO.	DESCRIPTION	Q'TY	MATERIAL	PLATING	CODE

TOLERANCE	Decimal ±0.1	DATE 2017. 03. 31.		 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017
	Angle ±1°	APPROVED BY		
MATERIAL	-	CHECKED BY		KJ COMTECH CO.,LTD. TITLE 7/16DIN50(J)-4H-TNC50(J) ADAPTOR
	-	DRAWN BY	I.C.KIM	
FINISH	-	SCALE	1.5/1	DWG NO. AD00589-7/3 REVISION 2 SHEET 1 of 1
	-	UNIT	mm	