
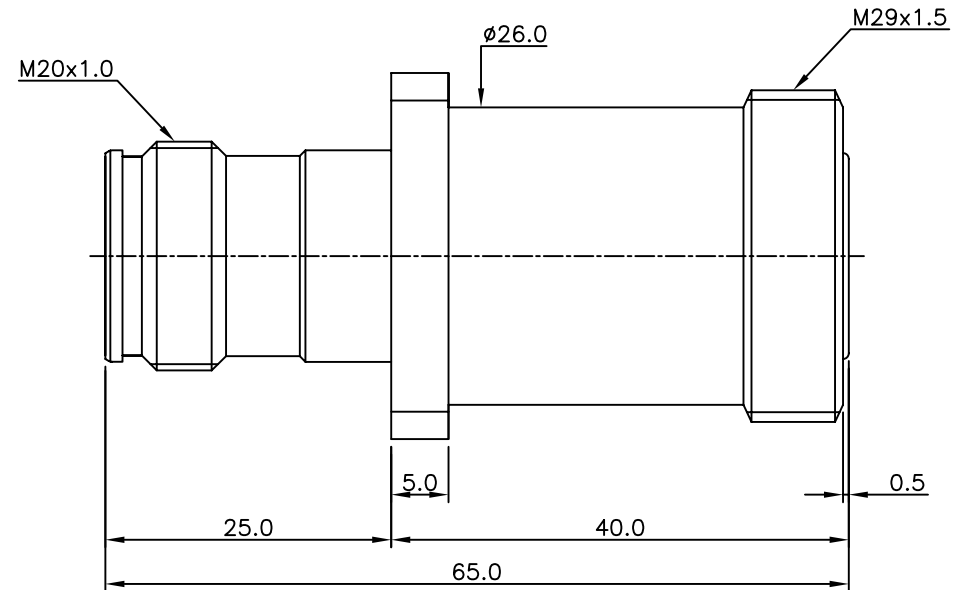


REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
IR	Initial Registration	C.K.KIM	I.C.KIM	2016.10.19.
1	[설번처리No.201703-0010] 고객사 요청 바디 도금 변경	I.C.KIM		2017.03.31.

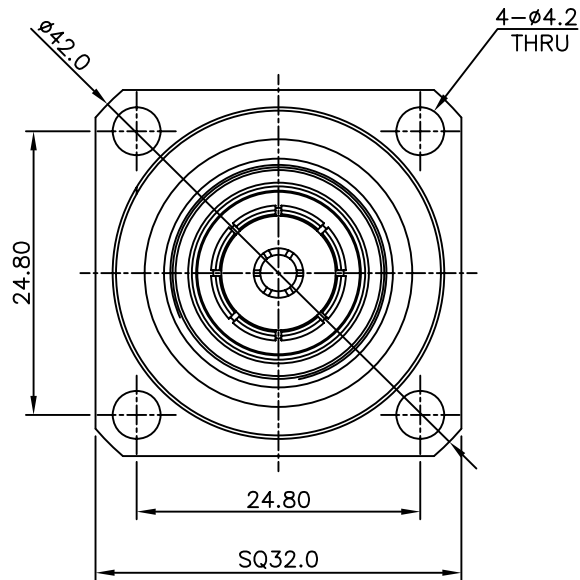

※내전압 검사 할 것

* 전기적 특성

1	Frequency range	DC ~ 3000MHz
2	Impedance	50ohm NOMINAL
3	V.S.W.R	1.2 : 1 (Max)
4	Insertion loss	-0.2dB (Min)
5	PIMD (-43dBm / 2 tone)	3차: 155dBc (Min)

9	END CAP	1	PLASTIC	WHITE	DGK00113-N/1
8	JACK	1	MBsBD C3604BD-F	이원합금(Ni/Tin) Silver Plate	DJA00228-5/7 DJA00228-5/6
7	INSULATOR	1	TEFLON		DIN01482-N/1
6	INSULATOR	1	TEFLON		DIN02810-N/1
5	GASKET	1	SILICONE RUB		DGK00055-N/1
4	CONTACT	1	MBsBD C3604BD-F	Silver Plate	DCT03738-5/1
3	CONTACT	1	BeCu C17300	Silver Plate	DCT03737-5/2
2	CONTACT	1	BeCu C17300	Silver Plate	DCT02680-5/4
1	BODY	1	MBsBD C3604BD-F	이원합금(Ni/Tin) SILVER PLATE	DAD00322-5/3 DAD00322-5/2
NO.	DESCRIPTION	Q'TY	MATERIAL	PLATING	CODE

TOLERANCE	Decimal	DATE 2017. 03. 31.		 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017
	Angle	APPROVED BY		
MATERIAL		CHECKED BY		KJ COMTECH CO.,LTD. TITLE 4.3/10DIN50J-4H-7/16DIN50J ADAPTOR
		DRAWN BY	I.C.KIM	
FINISH		SCALE	UNIT	A4 DWG NO. AD00590-7/4 REVISION 1 SHEET 1 of 1
		1.5/1	mm	