


AD00593-7/1

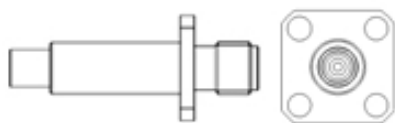

MCX (J) SMA (J)
4 HOLE □12.7-8.64-2.7
L:30.8mm(20.8-1.7-7.8)
BO/GO, PI/GO

AD00593-7/1

Frequency	
Insertion Loss	
VSWR	
Impedance	■ 50Ω □ 75Ω
Temperature	-40℃ ~ 125℃

S11/S22/S21(SWR, SWR, dB)

■_1.0GHz	- 1.04, 1.04, 0.11
■_2.0GHz	- 1.05, 1.06, 0.05
■_3.0GHz	- 1.11, 1.10, 0.00
■_4.0GHz	- 1.18, 1.19, 0.03

■_5.0GHz	- 1.24, 1.26, 0.12
■_6.0GHz	- 1.15, 1.16, 0.10
■_7.0GHz	- 1.17, 1.19, 0.11
■_8.0GHz	- 1.24, 1.22, 0.10

► NETWORK ANALYZER ► Test cable

► Test Adaptor

■ E5071B (~8.5GHz)

□ ZVA50 (~50GHz)

TR1: IN PORT VSWR(S11), TR2: OUT PORT VSWR(S22), TR3: Insertion Loss (S21)

