


AD00594-7/1

PIMD



4.3/10 DIN (P) N (J)
RA L:33.8-32.3mm
BO/SU/3, PI/SI/3, CAP/NI

AD00594-7/1

Frequency	
Insertion Loss	
VSWR	
Impedance	■ 50Ω □ 75Ω
Temperature	-40°C ~ 125°C

S11/S22/S21(SWR, SWR, dB)

■ _1.0GHz - 1.02, 1.02, 0.04
■ _2.0GHz - 1.03, 1.02, 0.01
■ _3.0GHz - 1.18, 1.19, 0.02
■ _4.0GHz - 1.12, 1.13, 0.02
■ _5.0GHz - 1.08, 1.09, 0.06
■ _6.0GHz - 1.18, 1.18, 0.13
■ _7.0GHz - 1.08, 1.07, 0.13

■ _8.0GHz - 1.77, 1.57, 1.13
MAX 8.1G - 2.39, 1.85, 3.70

▶ NETWORK ANALYZER

▶ Test cable

▶ Test Adaptor

■ E5071B (~8.5GHz)

■ N Male to N Male



■ 4.3/10 (J) N (J) AD00582-7/1

□ ZVA50 (~50GHz)

10GHz Cable (CF00539-7/1)

1 Active Ch/Trace 2 Response 3 Stimulus 4 Mkr/Analysis 5 Instr State

AD00594-1

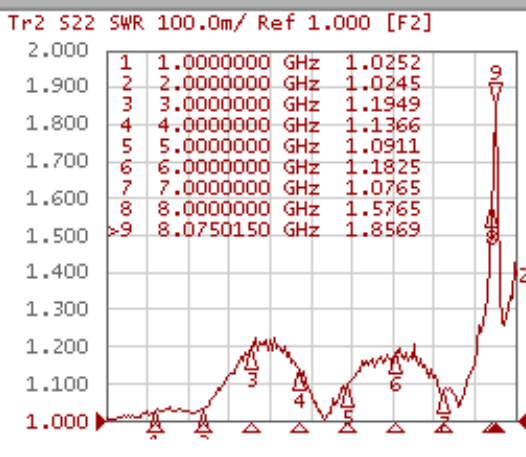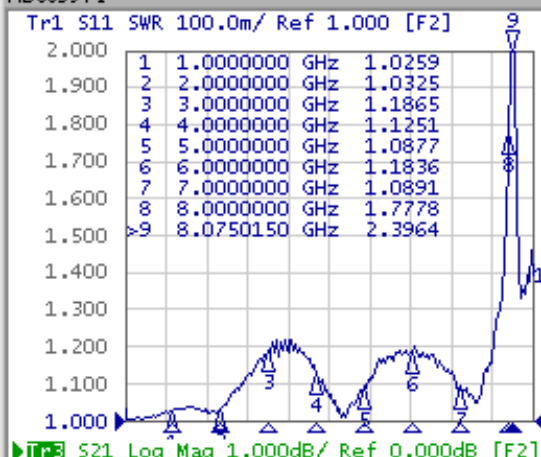

1 Start 300 kHz

IFBW 70 kHz

Stop 8.5 GHz Cor

Meas Stop ExtRef Ready Svc 2019-11-06 16:35

System

Print

Abort Printing

Printer Setup...

Invert Image

ON

Dump Screen Image...

Multipoint Test Set Setup

Misc Setup

Backlight

ON

Firmware

Revision

TR1: IN PORT VSWR(S11), TR2: OUT PORT VSWR(S22), TR3: Insertion Loss (S21)