


AD00597-7/1

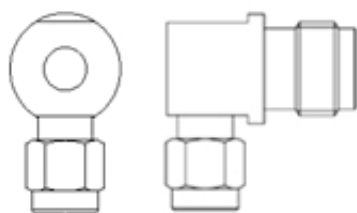

SMA (P) TNC (J)
RA L:22-23.2mm
BO/NI, PI/GO, CAP/NI

AD00597-7/1

Frequency	
Insertion Loss	
VSWR	
Impedance	■ 50Ω □ 75Ω
Temperature	-40°C ~ 125°C

S11/S22/S21(SWR, SWR, dB)

■ _1,0GHz - 1,05, 1,06, 0,05

■ _2,0GHz - 1,27, 1,27, 0,08
■ _3,0GHz - 1,41, 1,38, 0,55
■ _4,0GHz -
■ _5,0GHz -
■ _6,0GHz -
■ _7,0GHz -
■ _8,0GHz -

► NETWORK ANALYZER ► Test cable

► Test Adaptor

■ E5071B (~8.5GHz)

□ ZVA50 (~50GHz)

TR1 : IN PORT VSWR(S11), TR2 : OUT PORT VSWR(S22), TR3 : Insertion Loss (S21)

