


AD00604-7/1

이원합금

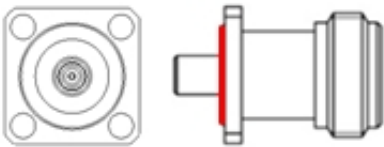

MCX (J) N (J) 4 HOLE
□17.5-12.7-3.2
L:24.7mm(6-2-16.7)
BO/Ni/TIN PI/Go

AD00604-7/1

Frequency	
Insertion Loss	
VSWR	
Impedance	■ 50Ω □ 75Ω
Temperature	-40℃ ~ 125℃

S11/S22/S21(SWR,SWR,dB)

■_1.0GHz	- 1.08, 1.07, 0.05
■_2.0GHz	- 1.08, 1.09, 0.09
■_3.0GHz	- 1.05, 1.08, 0.12
■_4.0GHz	- 1.04, 1.05, 0.16
■_5.0GHz	- 1.10, 1.08, 0.20

■_6.0GHz	- 1.21, 1.18, 0.22
■_7.0GHz	- 1.05, 1.06, 0.18
■_8.0GHz	- 1.16, 1.19, 0.19

▶ NETWORK ANALYZER ▶ Test cable ▶ Test Adaptor

- E5071B (~8.5GHz)
- ZVA50 (~50GHz)

TR1 : IN PORT VSWR(S11), TR2 : OUT PORT VSWR(S22), TR3: Insertion Loss (S21)

