


AD00605-7/1

PIMD



7/16 DIN (P)

TNC (P)

ST L:51mm

BO/SU, PI/SI, CAP/NI

AD00605-7/1

Frequency	
Insertion Loss	
VSWR	
Impedance	■ 50Ω □ 75Ω
Temperature	-40°C ~ 125°C

S11/S22/S21(SWR, SWR, dB)

■ _1.0GHz - 1.02, 1.01, 0.05
■ _2.0GHz - 1.09, 1.09, 0.10
■ _3.0GHz - 1.05, 1.07, 0.09
■ _4.0GHz - 1.13, 1.13, 0.14
■ _5.0GHz - 1.08, 1.06, 0.11

■ _6.0GHz - 1.38, 1.40, 0.28
■ _7.0GHz - 1.08, 1.13, 0.10
■ _8.0GHz - 1.24, 1.22, 0.13

► NETWORK ANALYZER

► Test cable

► Test Adaptor

■ E5071B (~8.5GHz)

■ N Male to N Male

■ 7/16 (J) N (J) AD00376-7/2

□ ZVA50 (~50GHz)


10GHz Cable (CF00539-7/1)

■ N (J) SMA (P) AD00423-7/1

■ SMA (J) TNC (J) PE사

1 Active Ch/Trace 2 Response 3 Stimulus 4 Mkr/Analysis 5 Instr State

AD00605-1

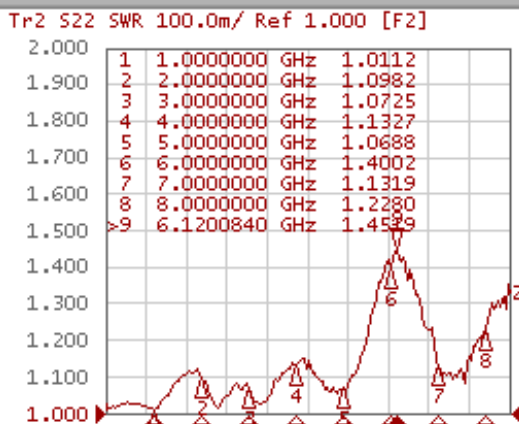

1 Start 300 kHz

IFBW 70 kHz

Stop 8.5 GHz

Meas Stop ExtRef Ready Svc 2019-10-30 13:36

Display

Allocate Channels

Num of Traces
3

Allocate Traces

Display Data

Data -> Mem

Data Math
OFF

Equation Editor...

Equation
OFF

Edit Title Label

TR1: IN PORT VSWR(S11), TR2: OUT PORT VSWR(S22), TR3: Insertion Loss (S21)