


AD00610-7/1

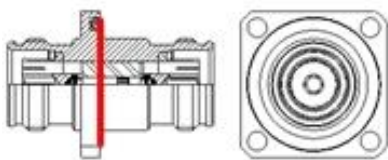

4.3/10 DIN (J)
4.3/10 DIN (J)
4 HOLE □32-24.8-4.2
L:45mm(16-4-25)
BO/NI/TIN, PI/SI/3

PIMD
이원합금

AD00610-7/1

Frequency	
Insertion Loss	
VSWR	
Impedance	■ 50Ω □ 75Ω
Temperature	-40℃ ~ 125℃

S11/S22/S21(SWR,SWR,dB)

■ _1.0GHz - 1.01, 1.02, 0.04
■ _2.0GHz - 1.08, 1.08, 0.02
■ _3.0GHz - 1.13, 1.12, 0.00
■ _4.0GHz - 1.09, 1.10, 0.02
■ _5.0GHz - 1.05, 1.04, 0.03
■ _6.0GHz - 1.12, 1.13, 0.09
■ _7.0GHz - 1.14, 1.14, 0.09
■ _8.0GHz - 1.18, 1.21, 0.11
MaX 8.3G - 1.24, 1.24, 0.15

► NETWORK ANALYZER

► Test cable

► Test Adaptor

■ E5071B (~8.5GHz)

■ N Male to N Male

■ 4.3/10 (P) N (J) 구매품 2EA

□ ZVA50 (~50GHz)

10GHz Cable (CF00539-7/1)

TR1 : IN PORT VSWR(S11), TR2 : OUT PORT VSWR(S22), TR3: Insertion Loss (S21)

