


AD00610-7/2

PIMD



4.3/10 DIN (J)

4.3/10 DIN (J)

ST L:45mm

BO/SU, PI/SI/3

AD00610-7/2

Frequency	
Insertion Loss	
VSWR	
Impedance	■ 50Ω □ 75Ω
Temperature	-40°C ~ 125°C

S11/S22/S21(SWR, SWR, dB)

■ _1.0GHz	- 1.01, 1.01
■ _2.0GHz	- 1.07, 1.07
■ _3.0GHz	- 1.13, 1.14
■ _4.0GHz	- 1.08, 1.09
■ _5.0GHz	- 1.06, 1.07
■ _6.0GHz	- 1.13, 1.13
■ _7.0GHz	- 1.16, 1.15

■ _8.0GHz	- 1.58, 1.36
MaX 8.0G	- 2.31, 1.79

▶ NETWORK ANALYZER

▶ Test cable

▶ Test Adaptor


■ E5071B (~8.5GHz)

■ N Male to N Male

■ 4.3/10 (P) N (J) 구매품 2EA

□ ZVA50 (~50GHz)

10GHz Cable (CF00539-7/1)

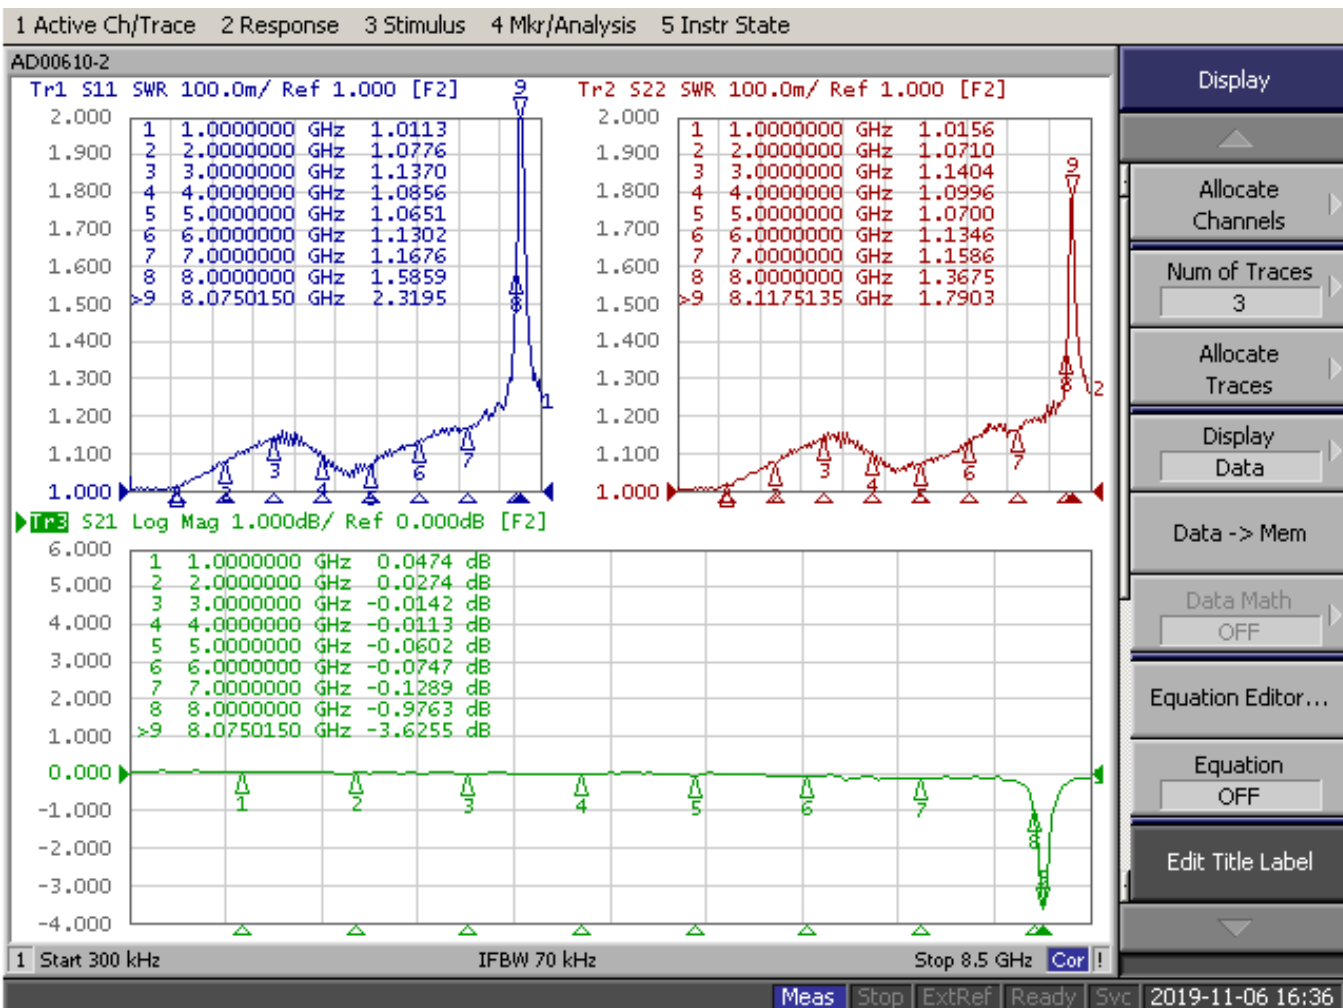

TR1: IN PORT VSWR(S11), TR2: OUT PORT VSWR(S22), TR3: Insertion Loss (S21)