
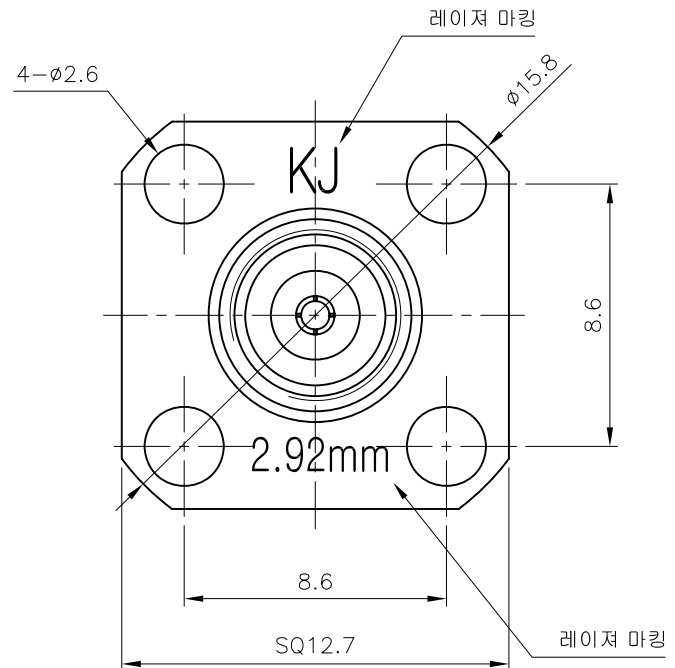


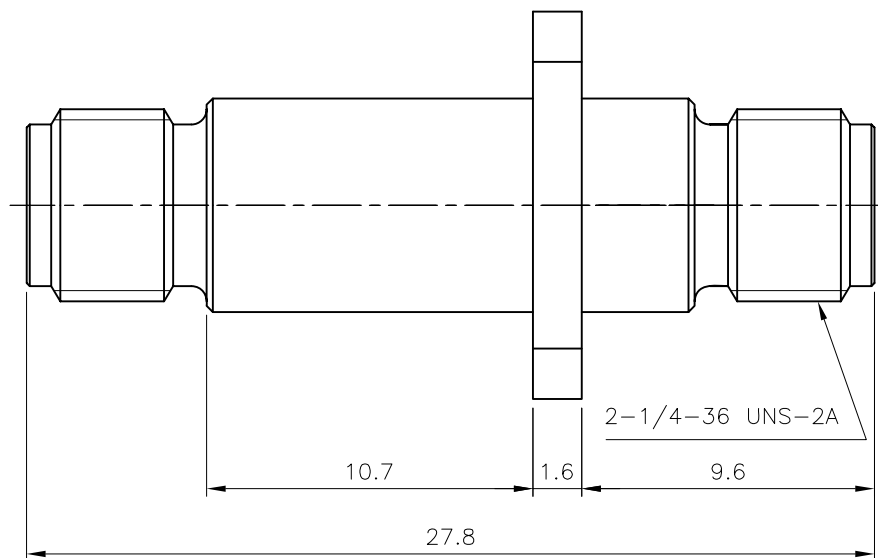

REVISION

REV	DESCRIPTION	DRAWN	APPR	DATE
5	Initial Registration	S.L.SON	J.H.YOUN	2018.06.12.
6	특성개선 부품 변경	S.L.SON	J.H.YOUN	2018.08.14.
7	재질 변경(SUS), 특성개선 INSERT 변경	S.L.SON	J.H.YOUN	2018.08.14.
8	부러짐 현상 보강	S.L.SON	J.H.YOUN	2019.06.28.

ELECTRICAL DATA

1. IMPEDANCE : 50ohm
2. FREQUENCY RANGE : DC~40GHz
3. VSWR (Max) : 1.2
4. INSERTION LOSS : 0.5dB (Max)

4	INSERT	1	SUS303	Passivated	DIS00283-5/E
3	INSULATOR	1	PEEK		DIN02942-N/I
2	CONTACT	1	BeCu C17300	Gold Plate	DAC03293-5/C
1	BODY	1	SUS303	Passivated	DAD00355-5/8
NO.	DESCRIPTION	Q'TY	MATERIAL	PLATING	CODE

TOLERANCE	Decimal ±0.2	DATE 2019. 06. 28.		 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017 KJ COMTECH CO.,LTD.		
	Angle ±1°	APPROVED BY J.H.YOUN				
MATERIAL _____		CHECKED BY		TITLE SMA 2.92mm (F) SMA 2.92mm (F) ST ADAPTOR		
		DRAWN BY S.L.SON				
FINISH _____		SCALE 4/1	UNIT mm		A4	
					DWG NO. AD00617-7/8	REVISION 8